




IP RATED DOWNLIGHTS

BATAN 10

design: Roberto Mantovani



Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 18V)

Power
Pouissance
Potencia
10W




FLEXALIGHTING

NORTH AMERICA



Photometric diagrams

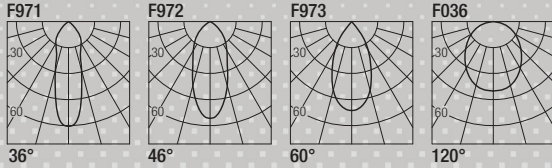

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

BN1 | XX | 9 | X | X


BN1	XX	Color Temp. Température couleur Temperatura de color	9	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz
		24 2400K			B White Blanc Blanco		S 36°
		27 2700K					M 46°
		30 3000K			N Black Noir Negro		W 60°
		35 3500K			K COR-TEN		X 120°
		40 4000K					
		DW Dim Warm			C Custom Personnalisée Personalizado		
		CU Custom Personnalisée Personalizado					

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

Static White	Phase / 0-10V (Dual Dimming)	
500mA	CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3

Dim to Warm	Phase / 0-10V (Dual Dimming)	
400mA	CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3

LOD1

Low luminance louvre

Filtre basse luminance
Filtro de baja luminancia





Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

T-Bar Installation

R02051
Mounting Plate
with 51mm Hole


MP-R051
Mounting Plate
with 51mm Hole

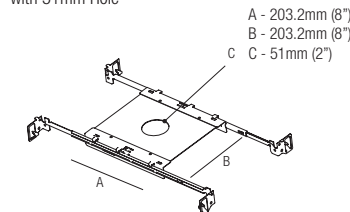

IC Housings

IC086R02051
Recessed Box for
Insulated Ceiling with
51mm Hole


AT086R02051
Air Tight Recessed
Box for Insulated
Ceiling with
51mm Hole



Optionals - Accessoires - Accesorios

CSBT10

Recessing box
Boîtier d'encastrement
Caja de empotrar



DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

