




IP RATED DOWNLIGHTS

# BATAN 5

design: Roberto Mantovani



**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**250mA (V<sub>f</sub> 18V)**

**Power**  
Pouissance  
Potencia  
**5W**




# FLEXALIGHTING

NORTH AMERICA



### Photometric diagrams

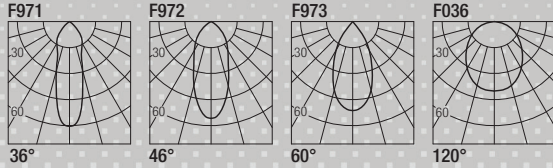

CCT	Flux	CRI
2700K	492 lm	98+
3000K	521 lm	98+
3500K	542 lm	98+
4000K	563 lm	98+

### Code Construction

Construction du code produit  
Construcción del código de producto

## BN5 XX 9 X X

<b>BN5</b>	<b>XX</b>	<b>Color Temp.</b> Température couleur Temperatura de color	<b>9</b>	<b>X</b>	<b>Finishing</b> Finitions Acabados	<b>X</b>	<b>Beam angle</b> Angle de faisceau Ángulo del haz
		<b>24</b> 2400K <b>27</b> 2700K <b>30</b> 3000K <b>35</b> 3500K <b>40</b> 4000K <b>CU</b> Custom Personnalisée Personalizado			<b>B</b> White Blanc Blanco <b>N</b> Black Noir Negro <b>K</b> COR-TEN <b>C</b> Custom Personnalisée Personalizado		<b>S</b> 36° <b>M</b> 46° <b>W</b> 60° <b>X</b> 120°


### Drivers (Remote)

Alimentateurs  
Alimentadores

Static White	Phase / 0-10V (Dual Dimming)		
250mA	<table border="1"> <tr> <td>CCPR010-A Min. 1 Max. 2</td> <td>CCPR040-A Min. 1 Max. 3</td> </tr> </table>	CCPR010-A Min. 1 Max. 2	CCPR040-A Min. 1 Max. 3
CCPR010-A Min. 1 Max. 2	CCPR040-A Min. 1 Max. 3		

### Series wiring

Câblage en série  
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory


### LOD5

**Low luminance louvre**  
Filtre basse luminance  
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture  
Note: le filtre doit être commandé en même temps que l'appareil  
Nota: el filtro debe pedirse junto con la luminaria

**MP-R040**  
Mounting Plate  
with 40mm Hole



### T-Bar Installation


**R02040**  
Mounting Plate  
with 40mm Hole



### IC Housings

**IC086R02040**  
Recessed Box for  
Insulated Ceiling with  
40mm Hole


**AT086R02040**  
Air Tight Recessed  
Box for Insulated  
Ceiling with  
40mm Hole



### Optionals - Accessoires - Accesorios

#### CSBT05

**Recessing box**  
Boîtier d'encastrement  
Caja de empotrar



#### DCVI.B.1

24VDC Constant Voltage to  
Constant Current Converter  
0-10V / Phase / Dim to Warm  
Compatible, 13W

