


BETA 2


design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 2.9V)

Power
Puissance
Potencia
1.5W



Photometric diagrams



CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4000K	154 lm	93

Code Construction

Construction du code produit
Construcción del código de producto

AP1 | X | XX | 5 |

ET1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	5	Beam angle Angle de faisceau Ángulo del haz
		B White Blanc Blanco		27 2700K		5 5°
		N Black Noir Negro		30 3000K		
		K COR-TEN		35 3500K		
		C Custom Personnalisée Personalizado		40 4000K		
				CU Custom Personnalisée Personalizado		


Drivers (Remote)

Alimentateurs
Alimentadores

Static White	Phase / 0-10V (Dual Dimming)	
500mA	CCPR010-A Min. 1 Max. 6	CCPR040-A Min. 1 Max. 18

Series wiring

Câblage en série
Cableado en serie




For other driver options - including Lutron, Dali and DMX - please consult factory


Optionals - Accessoires - Accesorios

CSBU01

Recessing box
Boîtier d'encastrement
Caja de empotrar




MP-R040
Mounting Plate
with 40mm Hole



T-Bar Installation

R02040
Mounting Plate
with 40mm Hole

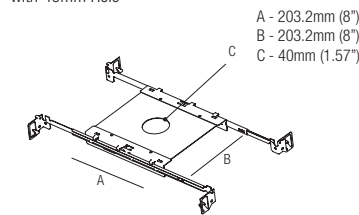

IC Housings

IC086R02040
Recessed Box for
Insulated Ceiling with
40mm Hole

AT086R02040
Air Tight Recessed
Box for Insulated
Ceiling with
40mm Hole

