


# BLACK 10


design: Lapo Grassellini

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**500mA (V<sub>i</sub> 18V)**

**Power**  
Puissance  
Potencia  
**10W**



## Photometric diagrams

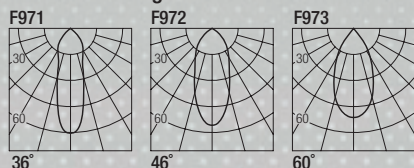

CCT	Flux	CRI	CCT	Flux	CRI
2700K	921 lm	98+	Dim to Warm 1800K-3000K	725 lm	95
3000K	977 lm	98+			95
3500K	1016 lm	98+			
4000K	1055 lm	98+			

## Code Construction

Construction du code produit  
Construcción del código de producto

**BK3 | X | XX | 9 | X |**


<b>BK3</b>	<b>X</b>	<b>Finishing</b> Finitions Acabados	<b>XX</b>	<b>Color Temp.</b> Température couleur Temperatura de color	<b>9</b>	<b>X</b>	<b>Beam angle</b> Angle de faisceau Ángulo del haz
		<b>1</b> White Blanc Blanco		<b>27</b> 2700K			<b>S</b> 36°
		<b>5</b> Black Noir Negro		<b>30</b> 3000K			<b>M</b> 46°
		<b>C</b> Custom Personnalisée Personalizado		<b>35</b> 3500K			<b>W</b> 60°
				<b>40</b> 4000K			
				<b>DW</b> Dim Warm			
				<b>CU</b> Custom Personnalisée Personalizado			

## Drivers (Remote)

Alimentateurs  
Alimentadores

## Series wiring

Câblage en série  
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

Static White	Phase / 0-10V (Dual Dimming)		
500mA	<table border="1"> <tr> <td>CCPRO10-A Min. 1 Max. 1</td> <td>CCPRO40-A Min. 1 Max. 3</td> </tr> </table>	CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3
CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3		
Dim to Warm	Phase / 0-10V (Dual Dimming)		
400mA	<table border="1"> <tr> <td>CCPRO10-A Min. 1 Max. 1</td> <td>CCPRO40-A Min. 1 Max. 3</td> </tr> </table>	CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3
CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3		
Turnable White			
500mA	Please consult factory for driver options		

## Optionals - Accessoires - Accesorios

### IC Housings

**IC064R01055**  
Recessed Box for  
Insulated Ceiling  
with 55mm Hole

**AT064R01055**  
Air Tight Recessed  
Box for Insulated  
Ceiling with  
55mm Hole

