


BLACK 2


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_I 2.9V)

Power
Puissance
Potencia
1.5W



Photometric diagrams

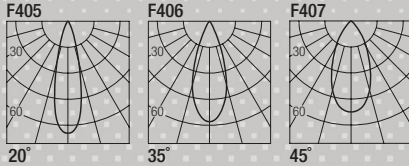

CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
4000K	154 lm	93

Code Construction

Construction du code produit
Construcción del código de producto

BK1 | X | XX | X₁


BK1	X	XX	X
Finishing Finitions Acabados	Color Temp. Température couleur Temperatura de color	Beam angle Angle de faisceau Ángulo del haz	
1 White Blanc Blanco	27 2700K	S 20°	
5 Black Noir Negro	30 3000K	M 35°	
C Custom Personnalisée Personalizado	40 4000K	W 45°	
	CU Custom Personnalisée Personalizado		

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring


Câblage en série
Cableado en serie




For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)	
500mA	CCPRO10-A Min. 1 Max. 6	CCPRO40-A Min. 1 Max. 18

MP-R030
Mounting Plate
with 30mm Hole



T-Bar Installation
R01030
Mounting Plate
with 30mm Hole

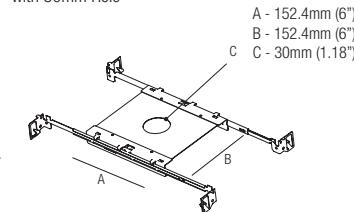

IC Housings

IC064R01030
Recessed Box for
Insulated Ceiling
with 30mm Hole

AT064R01030
Air Tight Recessed
Box for Insulated
Ceiling with
30mm Hole

