


BULL 10 BASE DOUBLE

design: Lapo Grassellini

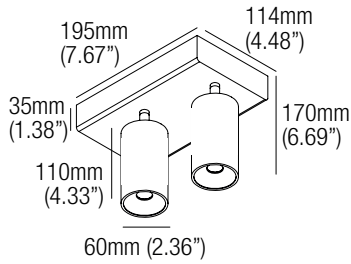


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V, 2 x 18V)

Power
Puissance
Potencia
2 x 10W




Photometric diagrams

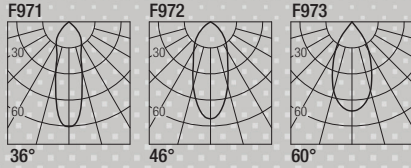

CCT	Flux _{total}	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95
Tunable White 2700K-5000K	952 lm	95

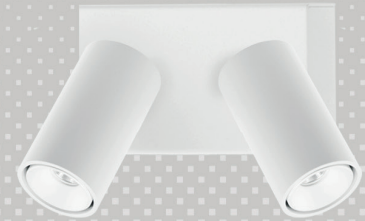

Code Construction

Construction du code produit
Construcción del código de producto

BB1 | X | X | XX | 9 | X | DBL

BB1	X	Color of the cylinder Couleur du cylindre Color del cilindro	X	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz	DBL
		1 White Blanc Blanco 5 Black Noir Negro C Custom Personnalisée Personalizado			24 2400K 27 2700K 30 3000K 35 3500K 40 4000K DW Dim Warm TW Tunable White CU Custom Personnalisée Personalizado			S 36° M 46° W 60°	

Optionals - Accessoires - Accesorios

2 x BUX1NA

Low luminance louvre


Filtre basse luminance
Filtro de baja luminancia



2 x BUX1FL


Adjustable barn door flaps

Volets orientables anti-éblouissement
Aletas direccionales



DCVI.B.2

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 26W




Drivers (Remote)

Alimentateurs
Alimentadores


Series wiring

Câblage en série
Cableado en serie




For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White Phase / 0-10V (Dual Dimming)



Dim to Warm Phase / 0-10V (Dual Dimming)



Turnable White Phase / 0-10V (Dual Dimming)

