


BULL 10 LAY


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 18V)

Power
Puissance
Potencia
10W



Photometric diagrams

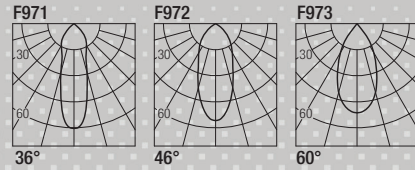

CCT	Flux	CRI	CCT	Flux	CRI
2400K	837 lm	95+	Dim to Warm 1800K-3000K	725 lm	95
2700K	921 lm	98+	Tunable White 2700K-5000K	952 lm	95
3000K	977 lm	98+			
3500K	1016 lm	98+			
4000K	1055 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

BX1 | X | X | XX | 9 | X |

BX1 **X** **Color of the cylinder** **X**
Couleur du cylindre
Color del cilindro

- 1** White
Blanc
Blanco
- 5** Black
Noir
Negro
- C** Custom
Personnalisée
Personalizado

XX **Color Temp.**
Température couleur
Temperatura de color

- 24** 2400K
- 27** 2700K
- 30** 3000K
- 35** 3500K
- 40** 4000K
- DW** Dim Warm
- TW** Tunable White
- CU** Custom
Personnalisée
Personalizado

9 **X** **Beam angle**
Angle de faisceau
Ángulo del haz

- S** 36°
- M** 46°
- W** 60°

Optionals - Accessoires - Accesorios


BUX1NA

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia




BUX1FL

Adjustable barn door flaps
Volets orientables anti-éblouissement
Aletas direccionales



DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W




Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
500mA	<ul style="list-style-type: none"> CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)
400mA	<ul style="list-style-type: none"> CCPR010-A Min. 1 Max. 1 CCPR040-A Min. 1 Max. 3
Turnable White	Phase / 0-10V (Dual Dimming)
500mA	Please consult manufactory for driver option