


BULL 20 BASE


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 36V)

Power
Pouissance
Potencia
20W

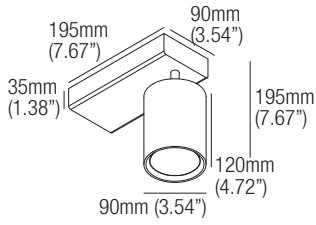

Photometric diagrams

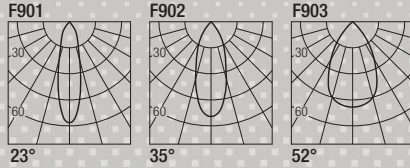

| CCT | Flux | CRI |
|-------|---------|-----|
| 2700K | 1659 lm | 93 |
| 3000K | 1752 lm | 93 |
| 3500K | 1873 lm | 93 |
| 4000K | 1925 lm | 93 |



Code Construction

Construction du code produit
Construcción del código de producto

BB2 | X | X | XX | 9 | X

| | | | | | | | | |
|------------|----------|--|----------|-----------|---|----------|----------|---|
| BB2 | X | Color of the cylinder Couleur du cylindre Color del cilindro | X | XX | Color Temp. Température couleur Temperatura de color | 9 | X | Beam angle Angle de faisceau Ángulo del haz |
| | | <p>1 White Blanc Blanco</p> <p>5 Black Noir Negro</p> <p>C Custom Personnalisée Personalizado</p> | | | <p>27 2700K</p> <p>30 3000K</p> <p>35 3500K</p> <p>40 4000K</p> <p>CU Custom Personnalisée Personalizado</p> | | | <p>S 23°</p> <p>M 35°</p> <p>W 52°</p> |

Optionals - Accessoires - Accesorios


BUX2NA

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia




BUX2FL

Adjustable barn door flaps
Volets orientables anti-éblouissement
Aletas direccionales



DCVI.B.2

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 26W




Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White Phase / 0-10V (Dual Dimming)

500mA

CCPRO40-A
Min. 1
Max. 1