


# BULL 20 LAY


design: Lapo Grassellini

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**500mA (V<sub>f</sub> 36V)**

**Power**  
Puissance  
Potencia  
**20W**



## Photometric diagrams

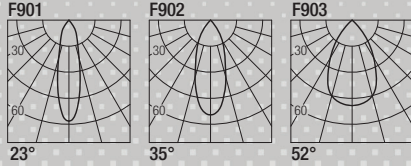

CCT	Flux	CRI
2700K	1659 lm	93
3000K	1752 lm	93
3500K	1873 lm	93
4000K	1925 lm	93

## Code Construction

Construction du code produit  
Construcción del código de producto

**BX2 | X | X | XX | 9 | X**

**BX2** **X** **Color of the cylinder** **X**  
Couleur du cylindre  
Color del cilindro

- 1** White  
Blanc  
Blanco
- 5** Black  
Noir  
Negro
- C** Custom  
Personnalisée  
Personalizado

**XX** **Color Temp.**  
Température couleur  
Temperatura de color

- 27** 2700K
- 30** 3000K
- 35** 3500K
- 40** 4000K
- CU** Custom  
Personnalisée  
Personalizado

**9** **X** **Beam angle**  
Angle de faisceau  
Ángulo del haz

- S** 23°
- M** 35°
- W** 52°

## Optionals - Accessoires - Accesorios


### BUX2NA

**Low luminance louvre**  
Filtre basse luminance  
Filtro de baja luminancia




### BUX2FL

**Adjustable barn door flaps**  
Volets orientables anti-éblouissement  
Aletas direccionales



### DCVI.B.2

24VDC Constant Voltage to  
Constant Current Converter  
0-10V / Phase / Dim to Warm  
Compatible, 26W




## Drivers (Remote)

Alimentateurs  
Alimentadores

## Series wiring

Câblage en série  
Cableado en serie



For other driver options -  
including Lutron, Dali and DMX -  
please consult factory

Static White Phase / 0-10V (Dual Dimming)

500mA

CCPRO40-A  
Min. 1  
Max. 1