


BULL 40 BASE


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
1050mA (V, 36V)

Power
Puissance
Potencia
40W

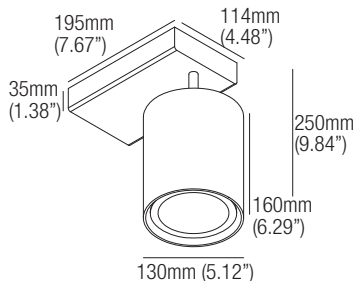

Photometric diagrams

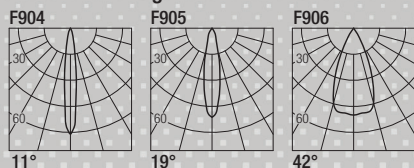

CCT	Flux	CRI
2700K	3400 lm	93
3000K	3660 lm	93
3500K	3780 lm	93
4000K	3900 lm	93

Code Construction

Construction du code produit
Construcción del código de producto

BB4 | X | X | XX | 9 | X |

BB4 **X** **Color of the cylinder** **X**
Couleur du cylindre
Color del cilindro

- 1** White
Blanc
Blanco
- 2** Grey
Gris
- 5** Black
Noir
Negro
- C** Custom
Personnalisée
Personalizado

XX **Color Temp.**
Température couleur
Temperatura de color

- 27** 2700K
- 30** 3000K
- 35** 3500K
- 40** 4000K
- CU** Custom
Personnalisée
Personalizado


9 **X** **Beam angle**
Angle de faisceau
Ángulo del haz

- S** 11°
- M** 19°
- W** 42°

Optionals - Accessoires - Accesorios


BUX4NA

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



BUX4FL

Adjustable barn door flaps
Volets orientables anti-éblouissement
Aletas direccionales




Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

Static White Phase / 0-10V (Dual Dimming)

1050mA

CCPR040-A
Min. 1
Max. 1