



## RECESSED OPTICS DOWNLIGHTS

# BYE


design: Roberto Mantovani

**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación  
**250mA** (V<sub>i</sub> 2.9V)

**Power**  
 Pouissance  
 Potencia  
**0.75W**

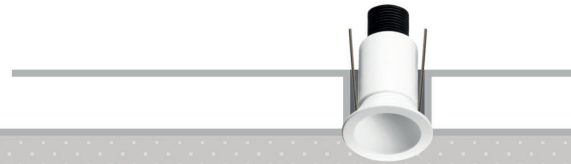

### Photometric diagrams



CCT	Flux	CRI
2700K	81 lm	93
3000K	81 lm	93
3500K	100 lm	93
4200K	107 lm	93

### Code Construction

Construction du code produit  
 Construcción del código de producto

**BY1 | X | X | XX**

BY1	X	Finishing	X	Beam angle	XX	Color Temp.
		Finitions Acabados		Angle de faisceau Ángulo del haz		Température couleur Temperatura de color
	<b>1</b>	White Blanc Blanco		<b>1</b> 20°		<b>27</b> 2700K
	<b>2</b>	Aluminum Aluminium Aluminio		<b>2</b> 40°		<b>30</b> 3000K
	<b>3</b>	Chrome Cromo				<b>35</b> 3500K
	<b>4</b>	Gold Or Oro				<b>42</b> 4200K
	<b>5</b>	Black Noir Negro				<b>CU</b> Custom Personnalisée Personalizado
	<b>6</b>	Bronze Bronce				
	<b>C</b>	Custom Personnalisée Personalizado				


### Drivers (Remote)

Alimentateurs  
 Alimentadores

Static White	Phase / 0-10V (Dual Dimming)		
250mA	<table border="1"> <tr> <td>CCPRO10-A Min. 1 Max. 13</td> <td>CCPRO40-A Min. 1 Max. 20</td> </tr> </table>	CCPRO10-A Min. 1 Max. 13	CCPRO40-A Min. 1 Max. 20
CCPRO10-A Min. 1 Max. 13	CCPRO40-A Min. 1 Max. 20		

### Series wiring

Câblage en série  
 Cableado en serie




For other driver options - including Lutron, Dali and DMX - please consult factory


### Optionals - Accessoires - Accesorios

#### CSYY01

Recessing box  
 Boîtier d'encastrement  
 Caja de empotrar




**MP-R020**  
 Mounting Plate  
 with 20mm Hole



#### T-Bar Installation

**R01020**  
 Mounting Plate  
 with 20mm Hole



### IC Housings

**IC064R01020**  
 Recessed Box for  
 Insulated Ceiling  
 with 20mm Hole

**AT064R01020**  
 Air Tight Recessed  
 Box for Insulated  
 Ceiling with  
 20mm Hole

