


# BYE

design: Roberto Mantovani




**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación  
**350 mA** (V<sub>i</sub> 2,9V)

**Power**  
 Pouissance  
 Potencia  
**1 W**

**Series wiring**  
 Câblage en série  
 Cableado en serie



**Photometric diagrams**

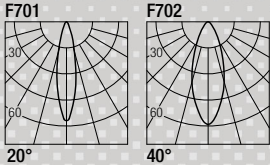

**CCT/CRI/Flux**

	350mA
2700K	81 lm
3000K	81 lm
3500K	100 lm
4200K	107 lm
Custom	TBD

**Code Construction**

Construction du code produit  
 Construcción del código de producto

**BY1 X X XX**

**Color Temperature**  
 Température couleur  
 Temperatura de color

27	30	35	42	CU
2700K	3000K	3500K	4200K	Custom

**Beam angle**  
 Angle de faisceau  
 Ángulo del haz

1	2
20°	40°

**Finishing**  
 Finitions  
 Acabados


1	2	3	4	5	6	7
White Blanc Blanco	Aluminum Aluminium Aluminio	Chrome Cromo	Gold Or Oro	Black Noir Negro	Bronze Bronce	Titanium Titane Titanio

**Optionals**

Accessori - Accessoires  
 Zubehör - Accesorios


**CSYY01**

**Recessing box**  
 Boîtier d'encastrement  
 Caja de empotrar




**Drivers**


Alimentateurs - Alimentadores

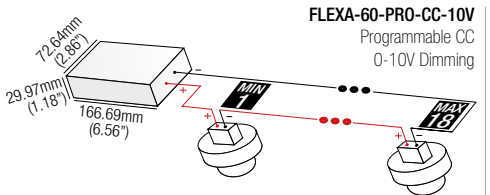

**FLEXA-60-PRO-CC-10V**  
 Programmable CC  
 0-10V Dimming

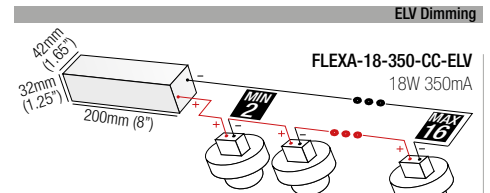


**FLEXA-18-350-CC-ELV**  
 18W 350mA

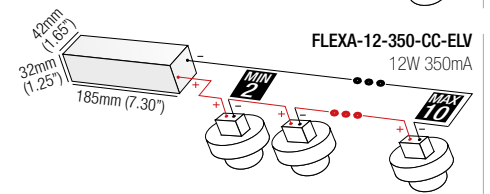

**FLEXA-12-350-CC-ELV**  
 12W 350mA

**R01020**

Mounting Plate + Arms  
 Open Size 20mm (0.79 inches)

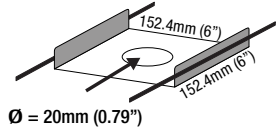

**IC064 + R01020**

Recessed Box for Insulated Ceiling + Mounting Plate

**AT064 + R01020**

Air Tight Recessed Box for Insulated Ceiling + Mounting Plate

