


CADMO 6

design: Roberto Mantovani




Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_r 8.7V) (CC)
500mA (V_r 2x8.7V) (CC)

Power
Puissance
Potencia
4.5W (single)
9W (double)



Photometric diagrams

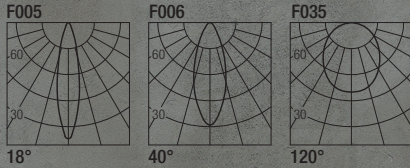

CCT	Flux	CRI
2700K	384 lm	93
3000K	400 lm	93
3500K	433 lm	93
4000K	462 lm	93



Code Construction

Construction du code produit
Construcción del código de producto

PXP | X | X | XX | X | X |


PXP	X	Emission	X	Finishing	XX	Color Temp.	X	Beam angle	X	Beam angle
		Émission Emisión		Finitions Acabados		Température couleur Temperatura de color		Angle de faisceau Ángulo del haz		Angle de faisceau Ángulo del haz
		1 Single Único 2 Double Doble		1 White Blanc Blanco 5 Black Noir Negro 9 COR-TEN C Custom Personnalisée Personalizado		27 2700K 30 3000K 35 3500K 40 4000K CU Custom Personnalisée Personalizado		S 18° F 40° W 120° D Blind Borgne Ciego		S 18° F 40° W 120° D Blind Borgne Ciego

Drivers (Remote)



Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

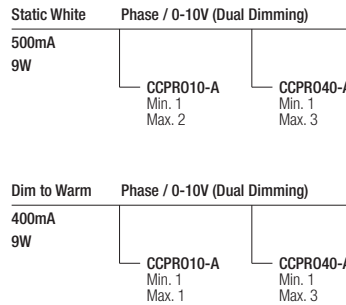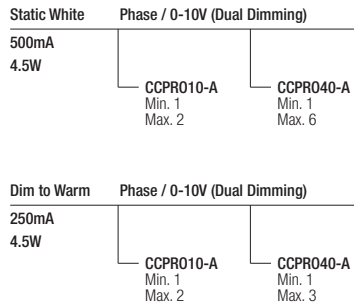

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

