


CORE 10


design: Lapo Grassellini

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 18V)

Power
 Pouissance
 Potencia
10W



Photometric diagrams

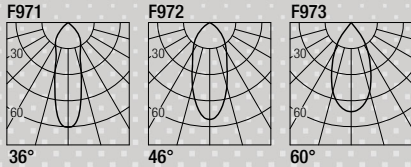

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+
† Dim Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
 Construcción del código de producto

C1 | X | XX | 9 | X |


C1	X	Finishing Finitions Acabados	XX Color Temp. Température couleur Temperatura de color	9	X Beam angle Angle de faisceau Ángulo del haz
	1	White Blanc Blanco	27 2700K	S	36°
	2	Grey Gris	30 3000K	M	46°
	5	Black Noir Negro	35 3500K	W	60°
			40 4000K		
			DW Dim Warm † @ 420mA		

Drivers

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



0-10V

FLEXA-60-PRO-CC-10V

Programmable 60W CC 0-10V Dimming
 Dimming Range: 0.1%
Min. 1/Max. 3 Fixtures per Driver

Phase

FLEXA-12-500-CC-ELV

12W 500mA Constant Current
 Dimming Range: 10%
Min. 1/Max. 1 Fixtures per Driver

FLEXA-23-500-CC-ELV

23W 500mA Constant Current
 Dimming Range: 10%
Min. 2/Max. 2 Fixtures per Driver

Lutron 2-Wire Phase

LTEA.2

Hi-Lume 2-Wire Phase
 500mA Constant Current
 Dimming Range: 1%
Min. 1/Max. 2 Fixtures per Driver

LTEA.3

Hi-Lume 2-Wire Phase
 500mA Constant Current
 Dimming Range: 1%
Min. 2/Max. 3 Fixtures per Driver

Lutron Ecosystem


LDE.1

Hi-Lume Ecosystem
 500mA Constant Current
 Dimming Range: 1%
Min. 1/Max. 1 Fixtures per Driver

LDE.2


Hi-Lume Ecosystem Premier
 500mA Constant Current
 Dimming Range: 1%
Min. 2/Max. 2 Fixtures per Driver

MP-R050
 Mounting Plate
 with 50mm Hole

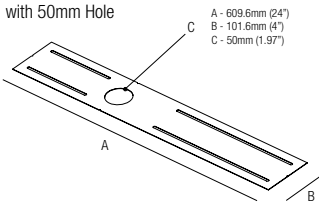

T-BAR Installation


R01050
 Mounting Plate
 with 50mm Hole

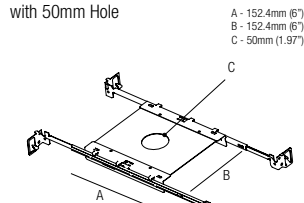

IC Housings

IC064R01050
 Recessed Box for
 Insulated Ceiling with
 50mm Hole

AT064R01050
 Air Tight Recessed Box
 for Insulated Ceiling with
 50mm Hole

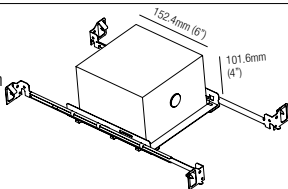

Optionals - Accessoires - Accesorios

Low luminance louvre
 Filtre basse luminance
 Filtro de baja luminancia



LOH1	LOH1B	LOH1G
White Blanc Blanco	Black Noir Negro	Grey Gris