


DAHLIA

design: Roberto Mantovani


Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 2.9V)

Power
 Pouissance
 Potencia
1.5W

48mm (1.89") 48mm (1.89")

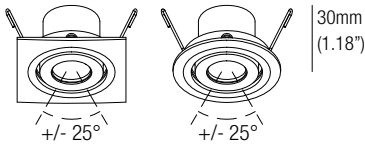

Photometric diagrams

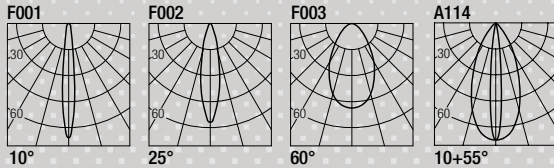

CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4200K	154 lm	93

Code Construction


Construction du code produit
 Construcción del código de producto

SJ | X | X | X | XX

SJ	X	Shape Forma Forme	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color
	1	Round Rond Redondo	1	White Blanc Blanco	0	10°	27	2700K
	2	Square Carré Cuadrado	2	Aluminum Aluminium Aluminio	1	25°	30	3000K
			3	Chrome Cromo	2	60°	35	3500K
			4	Gold Or Oro	3	10+55°	42	4200K
			5	Black Noir Negro			CU	Custom
			6	Bronze Bronce				

Drivers
 Alimentateurs
 Alimentadores

Series wiring
 Câblage en série
 Cableado en serie



0-10V

FLEXA-60-PRO-CC-10V
 Programmable 60W CC 0-10V Dimming
 Dimming Range: 0.1%
Min. 1/Max. 18 Fixtures per Driver

Phase

FLEXA-12-500-CC-ELV
 12W 500mA Constant Current
 Dimming Range: 10%
Min. 2/Max. 7 Fixtures per Driver

FLEXA-23-500-CC-ELV
 23W 500mA Constant Current
 Dimming Range: 10%
Min. 7/Max. 14 Fixtures per Driver

Lutron 2-Wire Phase

LTEA.1
 Hi-Lume 2-Wire Phase
 500mA Constant Current
 Dimming Range: 1%
Min. 3/Max. 6 Fixtures per Driver


LTEA.2
 Hi-Lume 2-Wire Phase
 500mA Constant Current
 Dimming Range: 1%
Min. 6/Max. 13 Fixtures per Driver

Lutron Ecosystem

LDE.1
 Hi-Lume Ecosystem
 500mA Constant Current
 Dimming Range: 1%
Min. 3/Max. 10 Fixtures per Driver


LDE.2
 Hi-Lume Ecosystem Premier
 500mA Constant Current
 Dimming Range: 1%
Min. 11/Max. 16 Fixtures per Driver

MP-R040
 Mounting Plate
 with 40mm Hole



T-BAR Installation


RO1040
 Mounting Plate
 with 40mm Hole



IC Housings

IC064R01040
 Recessed Box for
 Insulated Ceiling with
 40mm Hole

AT064R01040
 Air Tight Recessed Box
 for Insulated Ceiling with
 40mm Hole



Optionals - Accessoires - Accesorios

CS1005
 Recessing box
 Boîtier d'encastrement
 Caja de empotrar

