



ELIJAH R6

design: J. Allen

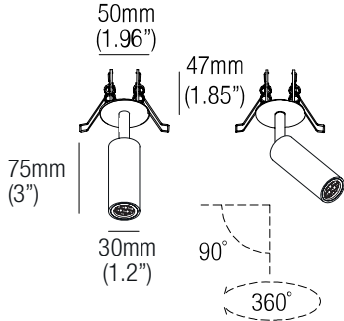


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 8.7V)

Power
Pouissance
Potencia
4.5W

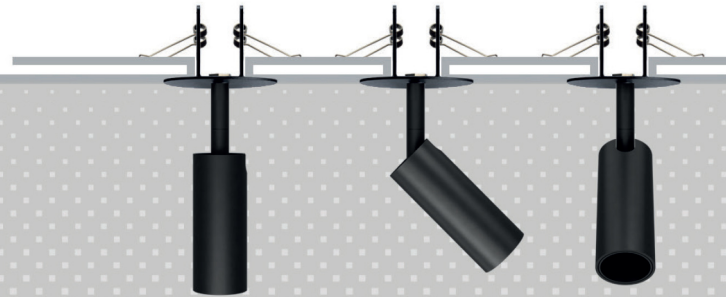

Photometric diagrams

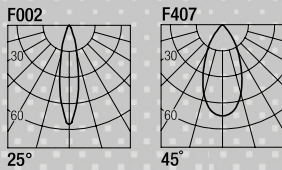

CCT	Flux	CRI
2400K	472 lm	95+
2700K	421 lm	98+
3000K	446 lm	98+
3500K	464 lm	98+
4000K	482 lm	98+
Dim to Warm 1800K-3000K	416 lm	90

Code Construction

Construction du code produit
Construcción del código de producto

ELJR6 | X | X | XX |


ELJR6	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color
		<ul style="list-style-type: none"> 1 White Blanc Blanco 5 Black Noir Negro C Custom Personnalisée Personalizado 		<ul style="list-style-type: none"> S 25° M 45° 		<ul style="list-style-type: none"> 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K DW Dim Warm CU Custom Personnalisée Personalizado

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)	
500mA	CCPRO10-A Min. 1 Max. 2	CCPRO40-A Min. 1 Max. 6
Dim to Warm	Phase / 0-10V (Dual Dimming)	
250mA	CCPRO10-A Min. 1 Max. 2	CCPRO40-A Min. 1 Max. 3

L001 (INCLUDED)


Low luminance louvre

Filtere basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-R040
Mounting Plate
with 40mm Hole

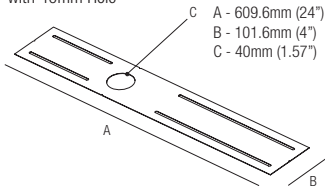

T-Bar Installation


R01040
Mounting Plate
with 40mm Hole

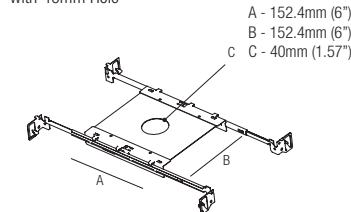

IC Housings

IC064R01040
Recessed Box for
Insulated Ceiling
with 40mm Hole


AT064R01040
Air Tight Recessed
Box for Insulated
Ceiling with
40mm Hole

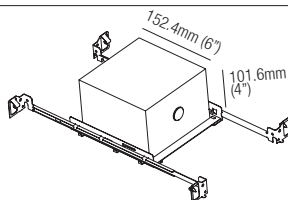

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W



Note: versions with extended arm length are available upon request
Nota: versioni con lunghezza del braccetto maggiorata disponibili su richiesta
Note: versions avec longueur du bras majorée disponibles sur demande