


# ELIJAH S6

design: J Allen


**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**500mA** (V<sub>f</sub> 8.7V)

**Power**  
Puissance  
Potencia  
**4.5W**


## Mini Canopy for Remote Wiring

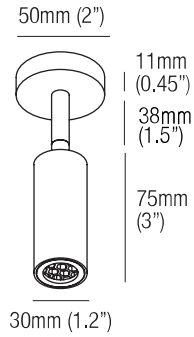

## Standard Canopy for JBox Wiring

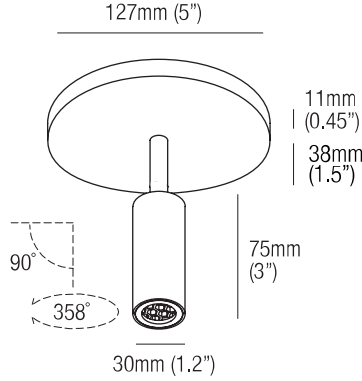

## Photometric diagrams

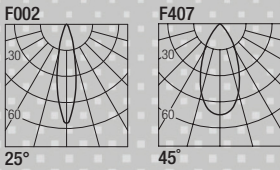

CCT	Flux	CRI
2400K	472 lm	95+
2700K	421 lm	98+
3000K	446 lm	98+
3500K	464 lm	98+
4000K	482 lm	98+
Dim to Warm 1800K-3000K	416 lm	90



## Code Construction

Construction du code produit  
Construcción del código de producto


ELJS6 | X | X | XX | X |

ELJS6	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	X	Canopy Canopée Cubierta
		1 White Blanc Blanco		S 25°		24 2400K		1 Mini
		5 Black Noir Negro		M 45°		27 2700K		2 Standard
		C Custom Personnalisée Personalizado				30 3000K		
						35 3500K		
						40 4000K		
						DW Dim Warm		
						CU Custom Personnalisée Personalizado		

## Drivers (Remote)

Alimentateurs  
Alimentadores

**Series wiring**  
Câblage en série  
Cableado en serie



For other driver options -  
including Lutron, Dali and DMX -  
please consult factory

Static White	Phase / 0-10V (Dual Dimming)	
500mA	CCPRO10-A Min. 1 Max. 2	CCPRO40-A Min. 1 Max. 6
Dim to Warm	Phase / 0-10V (Dual Dimming)	
250mA	CCPRO10-A Min. 1 Max. 2	CCPRO40-A Min. 1 Max. 3

## L001 (INCLUDED)

**Low luminance louver**  
Filtre basse luminance  
Filtro de baja luminancia



**Note:** the filter must be ordered together with the lighting fixture  
**Note:** le filtre doit être commandé en même temps que l'appareil  
**Nota:** el filtro debe pedirse junto con la luminaria

## Optionals - Accessoires - Accesorios

**DCVI.B.1**  
24VDC Constant Voltage to  
Constant Current Converter  
0-10V / Phase / Dim to Warm  
Compatible, 13W

