
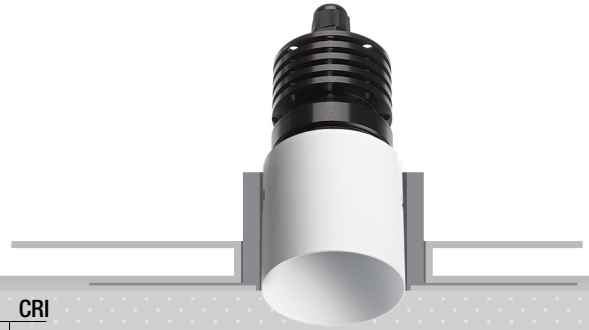


ERIS


design: Roberto Mantovani

Supply current
 Courant d'alimentation
 Corriente de alimentación
24VDC

Power
 Pouissance
 Potencia
7W



Photometric diagrams

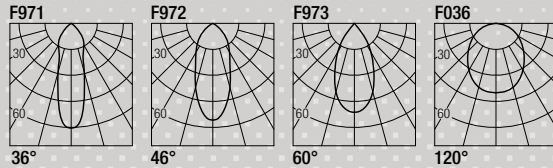

CCT	Flux	CRI
2700K	590 lm	98+
3000K	650 lm	98+
3500K	660 lm	98+
4000K	670 lm	98+

Code Construction

Construction du code produit
 Construcción del código de producto

ER1_|XX_|9_|X_|X_|


ER1	XX	Color Temp. Température couleur Temperatura de color	9	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz
		27 2700K			B White Blanc Blanco		S 36°
		30 3000K			N Black Noir Negro		M 46°
		35 3500K					W 60°
		40 4000K					X 120°
		CU Custom					

Drivers

Alimentateurs
 Alimentadores

Parallel wiring

Câblage en parallèle
 Cableado en paralelo



0-10V

DL010-024-100VD

100W CV 0-10V Dimming
 Dimming Range: 1%
Min. 1/Max. 10 Fixtures per Driver

Phase

DLELD-024-100W

96W Constant Voltage
 Dimming Range: 10%
Min. 1/Max. 10 Fixtures per Driver

Lutron 2-Wire Phase

LTEA.CV.1

Hi-Lume 2-Wire Phase
 40W Constant Voltage
 Dimming Range: 1%
Min. 1/Max. 5 Fixtures per Driver

LTEA.CV.2

Hi-Lume 2-Wire Phase
 96W Constant Voltage
 Dimming Range: 1%
Min. 1/Max. 10 Fixtures per Driver

Lutron Ecosystem

LDE.CV.1


Hi-Lume Ecosystem
 40W Constant Voltage
 Dimming Range: 1%
Min. 1/Max. 5 Fixtures per Driver

LDE.CV.2

Hi-Lume Ecosystem
 96W Constant Voltage
 Dimming Range: 1%
Min. 1/Max. 10 Fixtures per Driver

MP-R070


Mounting Plate
 with 70mm Hole

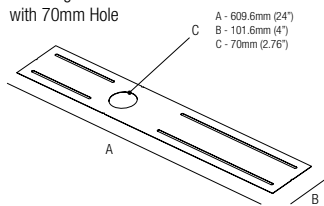

T-BAR Installation

RO1070

Mounting Plate
 with 70mm Hole

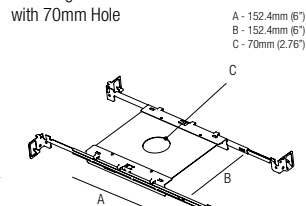


IC Housings

IC064R01070

Recessed Box for
 Insulated Ceiling with
 70mm Hole

AT064R01070

Air Tight Recessed Box
 for Insulated Ceiling with
 70mm Hole

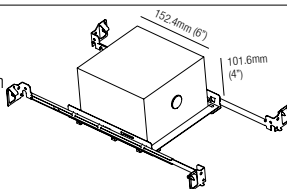


Accessories - Accessoires - Accesorios

ZTC10U

**Plasterboard
 recessing frame**
 Boîtier d'encastrement
 pour plaques de plâtre
 Cajetín para placas
 de yeso

44mm
 (1.73")



70mm
 (2.76")

120mm (4.72")

LOD1

Low luminance louvre
 Filtre basse luminance
 Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria