

# FLEXUS 10


design: Rod&Todd

**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación  
**500mA (V<sub>f</sub> 18V)**


**Power**  
 Pouissance  
 Potencia  
**10W**

# FLEXALIGHTING

NORTH AMERICA

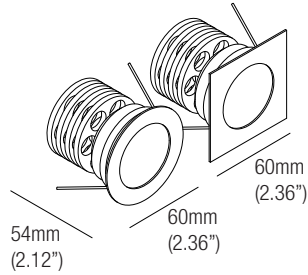

## Photometric diagrams

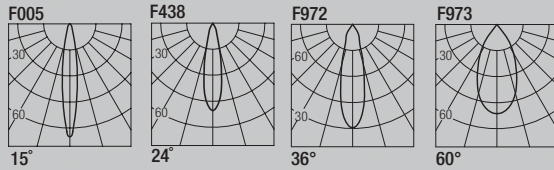

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95
Tunable White 2700K-5000K	952 lm	95

## Code Construction

Construction du code produit  
 Construcción del código de producto

**FX1 X X XX 9 X**


FX1	X	Shape	X	Finishing	XX	Color Temp.	9	X	Beam angle
Forma	Forme	Finitions	Acabados	Température couleur	Temperatura de color	Angle de faisceau	Ángulo del haz		
1	Round Rond Redondo	1	White Blanc Blanco	24	2400K	N	15°		
2	Square Carré Cuadrado	5	Black Noir Negro	27	2700K	S	24°		
		C	Custom Personnalisée Personalizado	30	3000K	M	36°		
				35	3500K	W	60°		
				40	4000K				
				DW	Dim Warm				
				TW	Tunable White				
				CU	Custom Personnalisée Personalizado				

## Drivers (Remote)


Alimentateurs  
 Alimentadores

## Series wiring

Câblage en série  
 Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

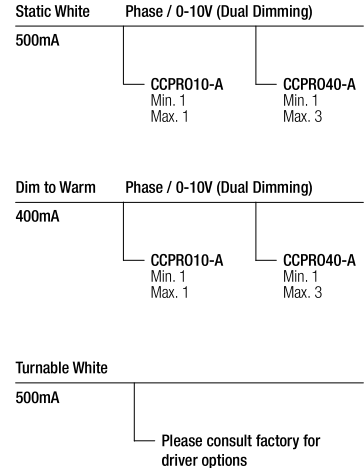


## L101

**Low luminance louvre**  
 Filtre basse luminance  
 Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture  
 Note: le filtre doit être commandé en même temps que l'appareil  
 Nota: el filtro debe pedirse junto con la luminaria

**MP-R055**  
 Mounting Plate  
 with 55mm Hole

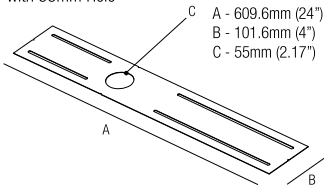

## T-Bar Installation


**RO1055**  
 Mounting Plate  
 with 55mm Hole



## IC Housings

**IC064R01055**  
 Recessed Box for  
 Insulated Ceiling  
 with 55mm Hole

**AT064R01055**  
 Air Tight Recessed  
 Box for Insulated  
 Ceiling with  
 55mm Hole

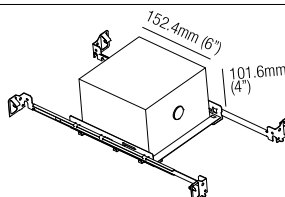

## Optionals - Accessoires - Accesorios

### DCVI.B.1

24VDC Constant Voltage to  
 Constant Current Converter  
 0-10V / Phase / Dim to Warm  
 Compatible, 13W

