
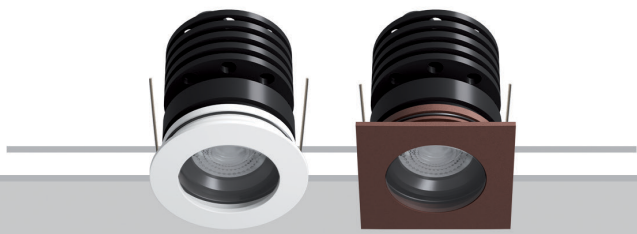


FLY 6


design: Rod&Todd

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_i 8.7V)

Power
 Pouissance
 Potencia
4.5W



Photometric diagrams

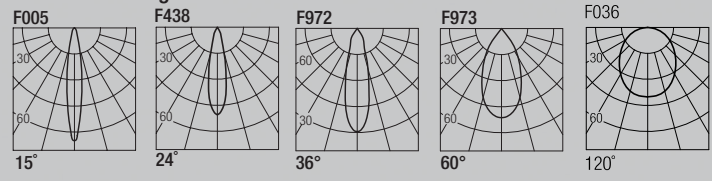

CCT	Flux	CRI	CCT	Flux	CRI
2400K	472 lm	95+	Dim to Warm 1800K-3000K	416 lm	90
2700K	421 lm	98+			
3000K	446 lm	98+			
3500K	464 lm	98+			
4000K	482 lm	98+			

Code Construction

Construction du code produit
 Construcción del código de producto

FLY6 X | X | XX | X |


FLY6	X	Shape Forma Forme	XX	Color Temp. Température couleur Temperatura de color	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz
		1 Round Rond Redondo		24 2400K		B White Blanc Blanco		N 15°
		2 Square Carré Cuadrado		27 2700K		N Black Noir Negro		S 24°
				30 3000K		K COR-TEN		M 36°
				35 3500K		Z INOX AISI 316L Steel Acier Acero		W 60°
				40 4000K		C Custom Personnalisée Personalizado		X 120°
				DW Dim Warm				
				CU Custom Personnalisée Personalizado				

Drivers (Remote)

Alimentateurs
 Alimentadores


Series wiring

Câblage en série
 Cableado en serie




For other driver options - including Lutron, Dali and DMX - please consult factory

Static White Phase / 0-10V (Dual Dimming)



Dim to Warm Phase / 0-10V (Dual Dimming)



L601


Low luminance louvre
 Filtre basse luminance
 Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

T-Bar Installation

MP-R051
 Mounting Plate
 with 51mm Hole




R01051
 Mounting Plate
 with 51mm Hole

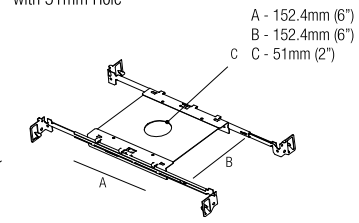

IC Housings

IC064R01051
 Recessed Box for Insulated Ceiling with 51mm Hole


AT064R01051
 Air Tight Recessed Box for Insulated Ceiling with 51mm Hole



Optionals - Accessoires - Accesorios

CSDS10

Recessing box
 Boîtier d'encastrement
 Caja de empotrar



DCVI.B.1

24VDC Constant Voltage to Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W

