
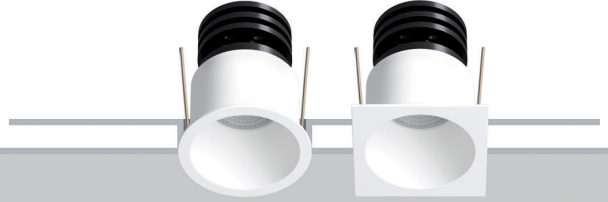


# FRANNY 6


design: Rod&Todd

**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación  
**500mA** (V<sub>f</sub> 8.7V)

**Power**  
 Pouissance  
 Potencia  
**4.5W**



## Photometric diagrams

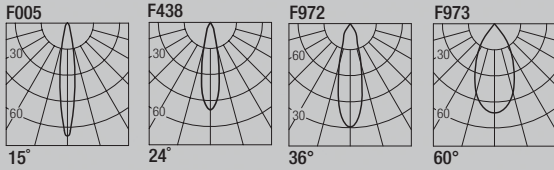

CCT	Flux	CRI
2400K	472 lm	95+
2700K	421 lm	98+
3000K	446 lm	98+
3500K	464 lm	98+
4000K	482 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	416 lm	90

## Code Construction

Construction du code produit  
 Construcción del código de producto


**FN6 | X | X | XX | X |**

<b>FN6</b>	<b>X</b>	<b>Shape</b> Forma Forme	<b>X</b>	<b>Finishing</b> Finitions Acabados	<b>XX</b>	<b>Color Temp.</b> Température couleur Temperatura de color	<b>X</b>	<b>Beam angle</b> Angle de faisceau Ángulo del haz
	<b>1</b>	Round Rond Redondo	<b>1</b>	White Blanc Blanco	<b>24</b>	2400K	<b>N</b>	15°
	<b>2</b>	Square Carré Cuadrado	<b>5</b>	Black Noir Negro	<b>27</b>	2700K	<b>S</b>	24°
			<b>C</b>	Custom Personnalisée Personalizado	<b>30</b>	3000K	<b>M</b>	36°
					<b>35</b>	3500K	<b>W</b>	60°
					<b>40</b>	4000K		
					<b>DW</b>	Dim Warm		
					<b>CU</b>	Custom Personnalisée Personalizado		

## Drivers (Remote)

Alimentateurs  
 Alimentadores

**Series wiring**  
 Câblage en série  
 Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

Static White  
 500mA

Phase / 0-10V (Dual Dimming)
CCPRO10-A Min. 1 Max. 2
CCPRO40-A Min. 1 Max. 6

Dim to Warm  
 250mA

Phase / 0-10V (Dual Dimming)
CCPRO10-A Min. 1 Max. 2
CCPRO40-A Min. 1 Max. 3

## L601

**Low luminance louvre**  
 Filtre basse luminance  
 Filtro de baja luminancia




**Note:** the filter must be ordered together with the lighting fixture  
**Note:** le filtre doit être commandé en même temps que l'appareil  
**Nota:** el filtro debe pedirse junto con la luminaria


## Optionals - Accessoires - Accesorios

### DCVI.B.1

24VDC Constant Voltage to  
 Constant Current Converter  
 0-10V / Phase / Dim to Warm  
 Compatible, 13W




**MP-R045**  
 Mounting Plate  
 with 45mm Hole



### T-Bar Installation

**R01045**  
 Mounting Plate  
 with 45mm Hole

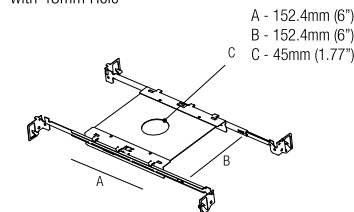

## IC Housings

**IC064R01045**  
 Recessed Box for  
 Insulated Ceiling  
 with 45mm Hole

**AT064R01045**  
 Air Tight Recessed  
 Box for Insulated  
 Ceiling with  
 45mm Hole

