
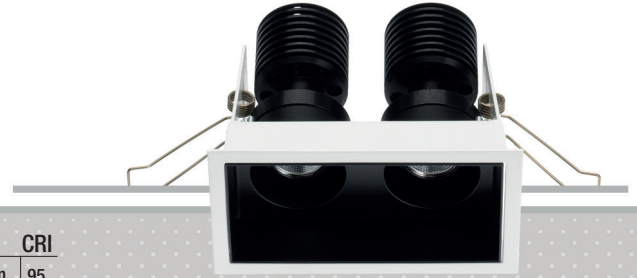


HAP 120


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_i 2 x 18V)

Power
Pouissance
Potencia
2 x 10W



Photometric diagrams

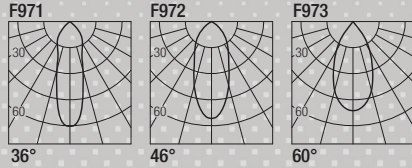

CCT	Flux _(x2)	CRI	CCT	Flux	CRI
2400K	837 lm	95+	Dim to Warm 1800K-3000K	725 lm	95
2700K	921 lm	98+	Tunable White 2700K-5000K	952 lm	95
3000K	977 lm	98+			
3500K	1016 lm	98+			
4000K	1055 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

HP12 | X | XX | 9 | X |


HP12	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		<ul style="list-style-type: none"> 1 White Blanc Blanco 5 Black Noir Negro C Custom Personnalisée Personalizado 		<ul style="list-style-type: none"> 24 2400K 27 2700K 30 3000K 35 3500K 40 4000K DW Dim Warm TW Tunable White CU Custom Personnalisée Personalizado 		<ul style="list-style-type: none"> S 36° M 46° W 60° 	

Drivers (Remote)


Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

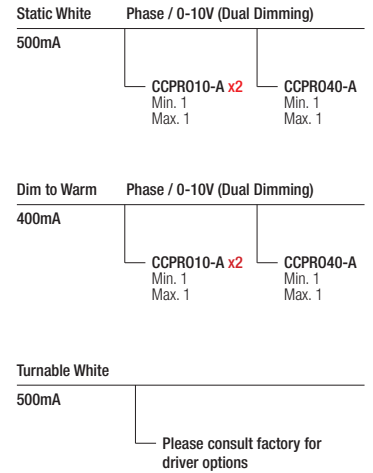

Low luminance louvre

Filtere basse luminace
Filtro de baja luminancia

2 x L0H1B


Black
Noir
Negro



Optionals - Accessoires - Accesorios


DCVI.B.2

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 26W



MP-X108


Mounting Plate
with 108x57mm Hole



T-Bar Installation

X02108

Mounting Plate
with 108x57mm Hole



IC Housings

IC086X02108

Recessed Box for
Insulated Ceiling
with 108x57mm Hole

AT086X02108

Air Tight Recessed
Box for Insulated
Ceiling with
108x57mm Hole

