


# HAP 130


design: Lapo Grassellini

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**500mA** (V<sub>i</sub> 3 x 18V)

**Power**  
Pouissance  
Potencia  
**3 x 10W**



## Photometric diagrams

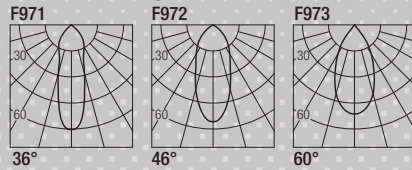

CCT	Flux <sub>(c3)</sub>	CRI	CCT	Flux	CRI
2700K	921 lm	98+	Dim to Warm	725 lm	95
3000K	977 lm	98+	1800K-3000K		
3500K	1016 lm	98+			
4000K	1055 lm	98+			

## Code Construction

Construction du code produit  
Construcción del código de producto

**HP13|X|XX|9|X|**


HP13	X	Finishing	XX	Color Temp.	9	X	Beam angle
		Finitions		Température couleur			Angle de faisceau
		Acabados		Temperatura de color			Ángulo del haz
	<b>1</b>	White Blanc Blanco	<b>27</b>	2700K	<b>S</b>	<b>36°</b>	
	<b>5</b>	Black Noir Negro	<b>30</b>	3000K	<b>M</b>	<b>46°</b>	
	<b>C</b>	Custom Personnalisée Personalizado	<b>35</b>	3500K	<b>W</b>	<b>60°</b>	
			<b>40</b>	4000K			
			<b>DW</b>	Dim Warm			
			<b>CU</b>	Custom Personnalisée Personalizado			

## Drivers (Remote)

Alimentateurs  
Alimentadores

## Series wiring

Câblage en série  
Cableado en serie



For other driver options -  
including Lutron, Dali and DMX -  
please consult factory

Static White	Phase / 0-10V (Dual Dimming)		
500mA	<table border="1"> <tr> <td>CCPR010-A x3 Min. 1 Max. 1</td> <td>CCPR040-A Min. 1 Max. 1</td> </tr> </table>	CCPR010-A x3 Min. 1 Max. 1	CCPR040-A Min. 1 Max. 1
CCPR010-A x3 Min. 1 Max. 1	CCPR040-A Min. 1 Max. 1		
Dim to Warm	Phase / 0-10V (Dual Dimming)		
400mA	<table border="1"> <tr> <td>CCPR010-A x3 Min. 1 Max. 1</td> <td>CCPR040-A Min. 1 Max. 1</td> </tr> </table>	CCPR010-A x3 Min. 1 Max. 1	CCPR040-A Min. 1 Max. 1
CCPR010-A x3 Min. 1 Max. 1	CCPR040-A Min. 1 Max. 1		
Turnable White			
500mA	Please consult factory for driver options		

## Optionals - Accessoires - Accesorios

### IC Housings

**IC127X03158**  
Recessed Box for  
Insulated Ceiling  
with 158x57mm Hole

**AT127X03158**  
Air Tight Recessed  
Box for Insulated  
Ceiling with  
158x57mm Hole

