


HAP 140


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 4 x 18V)

Power
Pouissance
Potencia
4 x 10W

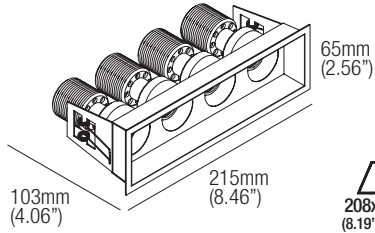

Photometric diagrams

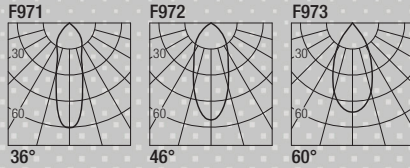

CCT	Flux _(x4)	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

HP14₁X₁XX₁9₁X₁


HP14	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K			S 36°
		5 Black Noir Negro		30 3000K			M 46°
		C Custom Personnalisée Personalizado		35 3500K			W 60°
				40 4000K			
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)		
500mA	<table border="1"> <tr> <td>CCPR010-A x4 Min. 1 Max. 1</td> <td>CCPR040-A x2 Min. 1 Max. 1</td> </tr> </table>	CCPR010-A x4 Min. 1 Max. 1	CCPR040-A x2 Min. 1 Max. 1
CCPR010-A x4 Min. 1 Max. 1	CCPR040-A x2 Min. 1 Max. 1		
Dim to Warm	Phase / 0-10V (Dual Dimming)		
400mA	<table border="1"> <tr> <td>CCPR010-A x4 Min. 1 Max. 1</td> <td>CCPR040-A x2 Min. 1 Max. 1</td> </tr> </table>	CCPR010-A x4 Min. 1 Max. 1	CCPR040-A x2 Min. 1 Max. 1
CCPR010-A x4 Min. 1 Max. 1	CCPR040-A x2 Min. 1 Max. 1		
Turnable White			
500mA	Please consult factory for driver options		

Optionals - Accessoires - Accesorios

IC Housings

IC127X03208
Recessed Box for
Insulated Ceiling
with 208x57mm Hole

AT127X03208
Air Tight Recessed
Box for Insulated
Ceiling with
208x57mm Hole

