
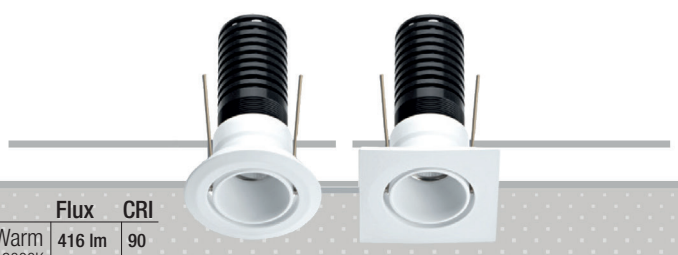


JOEL 6


design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 8.7V)

Power
Pouissance
Potencia
4.5W

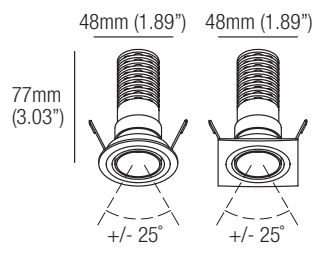

Photometric diagrams

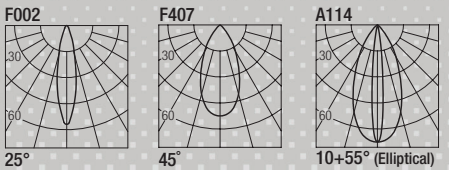

CCT	Flux	CRI	CCT	Flux	CRI
2400K	472 lm	95+	Dim to Warm 1800K-3000K	416 lm	90
2700K	421 lm	98+			
3000K	446 lm	98+			
3500K	464 lm	98+			
4000K	482 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

JL6 | X | X | X | XX | E |


JL6	X	Shape Forma Forme	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color	E
		<p>1 Round Rond Redondo</p> <p>2 Square Carré Cuadrado</p>		<p>1 White Blanc Blanco</p> <p>2 Aluminum Aluminium Aluminio</p> <p>3 Chrome Cromo</p> <p>4 Gold Or Oro</p> <p>5 Black Noir Negro</p> <p>6 Bronze Bronze</p> <p>C Custom Personnalisée Personalizado</p>		<p>1 25°</p> <p>2 45°</p> <p>D 10+55° (Elliptical)</p>		<p>24 2400K</p> <p>27 2700K</p> <p>30 3000K</p> <p>35 3500K</p> <p>40 4000K</p> <p>DW Dim Warm</p> <p>CU Custom Personnalisée Personalizado</p>	

Drivers (Remote)



Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie




For other driver options - including Lutron, Dali and DMX - please consult factory

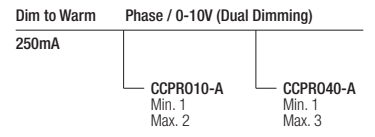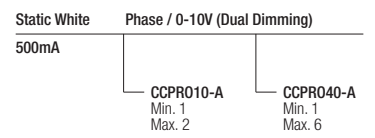


Optionals - Accessoires - Accesorios

CS1005
Recessing box
Boîtier d'encastrement
Caja de empotrar



DCVI.B.1
24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W



LJL6E01


Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

MP-R040


Mounting Plate
with 40mm Hole

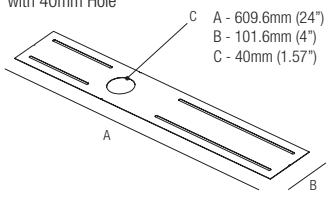

T-Bar Installation

R01040

Mounting Plate
with 40mm Hole

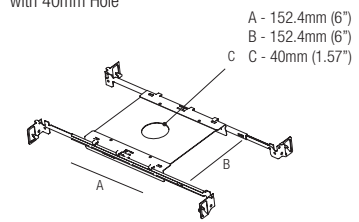

IC Housings

IC064R01040
Recessed Box for
Insulated Ceiling
with 40mm Hole

AT064R01040
Air Tight Recessed
Box for Insulated
Ceiling with
40mm Hole

