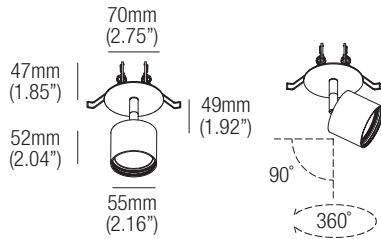


LAD R6

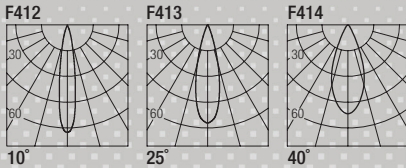
design: Roberto Mantovani

Supply current
Courant d'alimentation
Corriente de alimentaciónPower
Puissance
Potencia500mA (V_i 8.7V)

4.5W



Photometric diagrams



CCT	Flux	CRI
2400K	472 lm	95+
2700K	421 lm	98+
3000K	446 lm	98+
3500K	464 lm	98+
4000K	482 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	416 lm	90



Code Construction


Construction du code produit
Construcción del código de producto**LADR6 X XX X**

LADR6	X	XX	X
Finishing Finitions Acabados	Color Temp. Température couleur Temperatura de color	Beam angle Angle de faisceau Ángulo del haz	
1 White Blanc Blanco	24 2400K	1 10°	
5 Black Noir Negro	27 2700K	2 25°	
C Custom Personnalisée Personalizado	30 3000K	3 40°	
	35 3500K		
	40 4000K		
	DW Dim Warm		
	CU Custom Personnalisée Personalizado		

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serieFor other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White 500mA	Phase / 0-10V (Dual Dimming)		
	<table border="1"> <tr> <td>CCPR010-A Min. 1 Max. 2</td> <td>CCPR040-A Min. 1 Max. 6</td> </tr> </table>	CCPR010-A Min. 1 Max. 2	CCPR040-A Min. 1 Max. 6
CCPR010-A Min. 1 Max. 2	CCPR040-A Min. 1 Max. 6		
Dim to Warm 250mA	Phase / 0-10V (Dual Dimming)		
	<table border="1"> <tr> <td>CCPR010-A Min. 1 Max. 2</td> <td>CCPR040-A Min. 1 Max. 3</td> </tr> </table>	CCPR010-A Min. 1 Max. 2	CCPR040-A Min. 1 Max. 3
CCPR010-A Min. 1 Max. 2	CCPR040-A Min. 1 Max. 3		


Optionals - Accessoires - Accesorios

LL02


Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia

Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

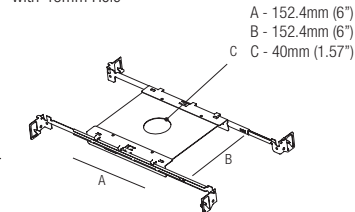
DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

Note: versions with extended arm length are available upon request
Nota: versioni con lunghezza del braccetto maggiorata disponibili su richiesta
Note: versions avec longueur du bras majorée disponibles sur demande

MP-R040
Mounting Plate
with 40mm Hole

T-Bar Installation

R01040
Mounting Plate
with 40mm Hole

IC Housings

IC064R01040
Recessed Box for
Insulated Ceiling
with 40mm HoleAT064R01040
Air Tight Recessed
Box for Insulated
Ceiling with
40mm Hole