



LEDA R10

design: Lapo Grassellini
104mm (4.09")

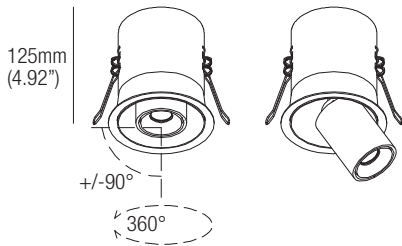


Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 18V)

Power
Puissance
Potencia
10W

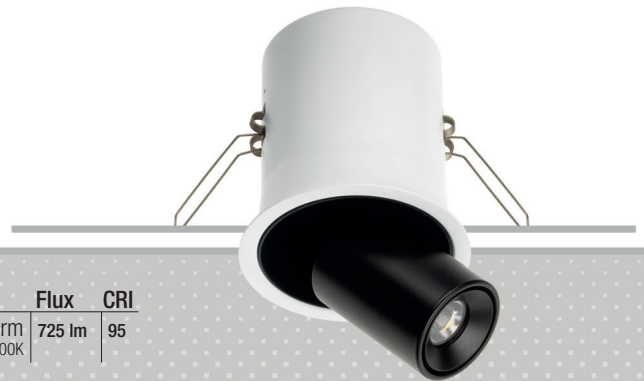

Photometric diagrams

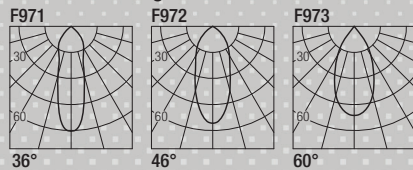

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

LDR | X | XX | 9 | X |


LDR	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
	1	White Blanc Blanco	24	2400K	S	36°	
	5	Black Noir Negro	27	2700K	M	46°	
	C	Custom Personnalisée Personalizado	30	3000K	W	60°	
			35	3500K			
			40	4000K			
			DW	Dim Warm			
			CU	Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White 500mA	Phase / 0-10V (Dual Dimming)	
	CCPR10-A Min. 1 Max. 1	CCPR040-A Min. 1 Max. 3
Dim to Warm 400mA	Phase / 0-10V (Dual Dimming)	
	CCPR10-A Min. 1 Max. 1	CCPR040-A Min. 1 Max. 3

L001

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

T-Bar Installation

RO1095
Mounting Plate
with 95mm Hole


MP-R095
Mounting Plate
with 95mm Hole

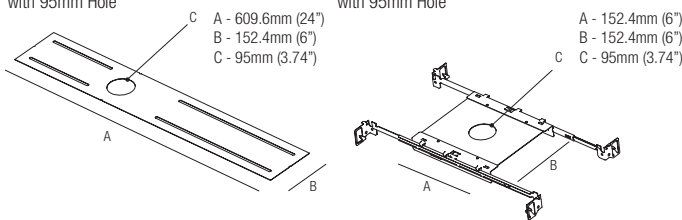

IC Housings

IC086R02095
Recessed Box for
Insulated Ceiling
with 95mm Hole

AT086R02095
Air Tight Recessed
Box for Insulated
Ceiling with
95mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

