


LOLLO 10


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_I 18V)

Power
Puissance
Potencia
10W



Photometric diagrams

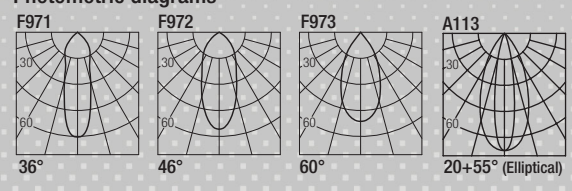

CCT	Flux	CRI	CCT	Flux	CRI
2700K	921 lm	98+	Dim to Warm	725 lm	95
3000K	977 lm	98+	1800K-3000K		
3500K	1016 lm	98+			
4000K	1055 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

LL1 | X | XX | 9 | X |


LL1	X	Finishing	XX	Color Temp.	9	X	Beam angle
		Finitions Acabados		Température couleur Temperatura de color			Angle de faisceau Ángulo del haz
	1	White Blanc Blanco		27 2700K		S	36°
				30 3000K		M	46°
	5	Black Noir Negro		35 3500K		W	60°
				40 4000K		D	20+55° (Elliptical)
	C	Custom Personnalisée Personalizado		DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)		
500mA	<table border="1"> <tr> <td>CCPRO10-A Min. 1 Max. 1</td> <td>CCPRO40-A Min. 1 Max. 3</td> </tr> </table>	CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3
CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3		
Dim to Warm	Phase / 0-10V (Dual Dimming)		
400mA	<table border="1"> <tr> <td>CCPRO10-A Min. 1 Max. 1</td> <td>CCPRO40-A Min. 1 Max. 3</td> </tr> </table>	CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3
CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3		
Turnable White	Phase / 0-10V (Dual Dimming)		
500mA	Please consult manufactory for driver option		

Optionals - Accessoires - Accesorios

IC Housings

IC064Q01070
Recessed Box for
Insulated Ceiling
with 70mm Hole

AT064Q01070
Air Tight Recessed
Box for Insulated
Ceiling with
70mm Hole

