


# LOLLO 10


design: Lapo Grassellini

**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación  
**500mA (V<sub>i</sub> 18V)**

**Power**  
 Pouissance  
 Potencia  
**10W**

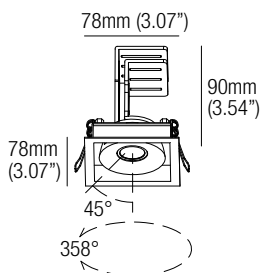

## Photometric diagrams

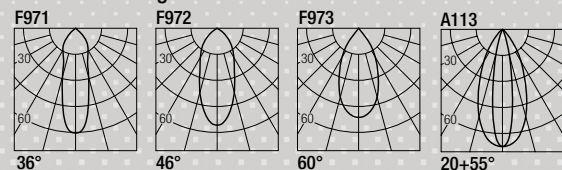

CCT	Flux	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+
† Dim Warm 1800K-3000K	725 lm	95

## Code Construction

Construction du code produit  
 Construcción del código de producto

LL1 | X | XX | 9 | X |


LL1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
	1	White Blanc Blanco	27	2700K		S	36°
	2	Grey Gris	30	3000K		M	46°
	5	Black Noir Negro	35	3500K		W	60°
			40	4000K		D	20+55°
			DW	Dim Warm † @ 420mA			

## Drivers

Alimentateurs  
 Alimentadores

## Series wiring

Câblage en série  
 Cableado en serie



## 0-10V

**FLEXA-60-PRO-CC-10V**  
 Programmable 60W CC 0-10V Dimming  
 Dimming Range: 0.1%  
**Min. 1/Max. 3 Fixtures per Driver**

## Phase

**FLEXA-12-500-CC-ELV**  
 12W 500mA Constant Current  
 Dimming Range: 10%  
**Min. 1/Max. 1 Fixtures per Driver**

**FLEXA-23-500-CC-ELV**  
 23W 500mA Constant Current  
 Dimming Range: 10%  
**Min. 2/Max. 2 Fixtures per Driver**

## Lutron 2-Wire Phase

**LTEA.2**  
 Hi-Lume 2-Wire Phase  
 500mA Constant Current  
 Dimming Range: 1%  
**Min. 1/Max. 2 Fixtures per Driver**


**LTEA.3**  
 Hi-Lume 2-Wire Phase  
 500mA Constant Current  
 Dimming Range: 1%  
**Min. 2/Max. 3 Fixtures per Driver**

## Lutron Ecosystem


**LDE.1**  
 Hi-Lume Ecosystem  
 500mA Constant Current  
 Dimming Range: 1%  
**Min. 1/Max. 1 Fixtures per Driver**

**LDE.2**  
 Hi-Lume Ecosystem Premier  
 500mA Constant Current  
 Dimming Range: 1%  
**Min. 2/Max. 2 Fixtures per Driver**

**MP-Q070**  
 Mounting Plate  
 with 70mm Hole




**T-BAR Installation**  
**Q01070**  
 Mounting Plate  
 with 70mm Hole



## IC Housings

**IC064Q01070**  
 Recessed Box for  
 Insulated Ceiling with  
 70mm Hole

**AT064Q01070**  
 Air Tight Recessed Box  
 for Insulated Ceiling with  
 70mm Hole

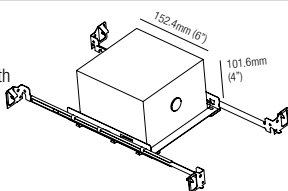

## Optionals - Accessoires - Accesorios

### L001

**Low luminance louvre**  
 Filtre basse luminance  
 Filtro de baja luminancia



**Note:** the filter must be ordered together with the lighting fixture  
**Note:** le filtre doit être commandé en même temps que l'appareil  
**Nota:** el filtro debe pedirse junto con la luminaria