


LOLLO X120


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 2 x 18V)

Power
Puissance
Potencia
2 x 10W



Photometric diagrams

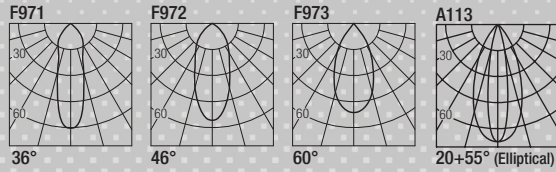

CCT	Flux _(x2)	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

LLX12 | X | XX | 9 | X |


LLX12	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K			S 36°
		5 Black Noir Negro		30 3000K			M 46°
		C Custom Personnalisée Personalizado		35 3500K			W 60°
				40 4000K			D 20+55° (Elliptical)
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White 500mA	Phase / 0-10V (Dual Dimming)		
	<table border="1"> <tr> <td>CCPRO10-A x2 Min. 1 Max. 1</td> <td>CCPRO40-A Min. 1 Max. 1</td> </tr> </table>	CCPRO10-A x2 Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 1
CCPRO10-A x2 Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 1		
Dim to Warm 400mA	Phase / 0-10V (Dual Dimming)		
	<table border="1"> <tr> <td>CCPRO10-A x2 Min. 1 Max. 1</td> <td>CCPRO40-A Min. 1 Max. 1</td> </tr> </table>	CCPRO10-A x2 Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 1
CCPRO10-A x2 Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 1		
Turnable White 500mA	Please consult factory for driver options		

Optionals - Accessoires - Accesorios

IC Housings

IC086X02135
Recessed Box for
Insulated Ceiling
with 135x70mm Hole

AT086X02135
Air Tight Recessed
Box for Insulated
Ceiling with
135x70mm Hole

