


# LOLLO X130


design: Lapo Grassellini

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**500mA (V<sub>f</sub> 3 x 18V)**

**Power**  
Puissance  
Potencia  
**3 x 10W**

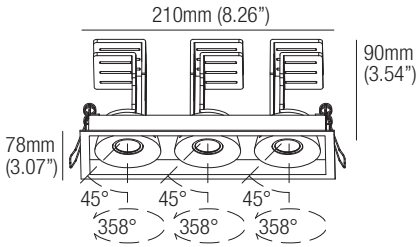

## Photometric diagrams

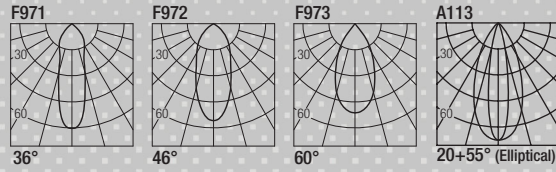

CCT	Flux <sub>(x3)</sub>	CRI
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95

## Code Construction

Construction du code produit  
Construcción del código de producto

**LLX13 X XX 9 X**


LLX13	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		<b>1</b> White Blanc Blanco		<b>27</b> 2700K			<b>S</b> 36°
		<b>5</b> Black Noir Negro		<b>30</b> 3000K			<b>M</b> 46°
		<b>C</b> Custom Personnalisée Personalizado		<b>35</b> 3500K			<b>W</b> 60°
				<b>40</b> 4000K			<b>D</b> 20+55° (Elliptical)
				<b>DW</b> Dim Warm			
				<b>CU</b> Custom Personnalisée Personalizado			

## Drivers (Remote)

Alimentateurs  
Alimentadores

## Series wiring

Câblage en série  
Cableado en serie



For other driver options -  
including Lutron, Dali and DMX -  
please consult factory

Static White 500mA	Phase / 0-10V (Dual Dimming)
	CCPR010-A x3 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Dim to Warm 400mA	Phase / 0-10V (Dual Dimming)
	CCPR010-A x3 Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 1
Turnable White 500mA	Please consult factory for driver options

## Optionals - Accessoires - Accesorios

### IC Housings

**IC127X03200**  
Recessed Box for  
Insulated Ceiling  
with 200x70mm Hole

**AT127X03200**  
Air Tight Recessed  
Box for Insulated  
Ceiling with  
200x70mm Hole

