


# LOLLO X230


design: Lapo Grassellini

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**500mA** (V, 3 x 36V)

**Power**  
Puissance  
Potencia  
**3 x 20W**

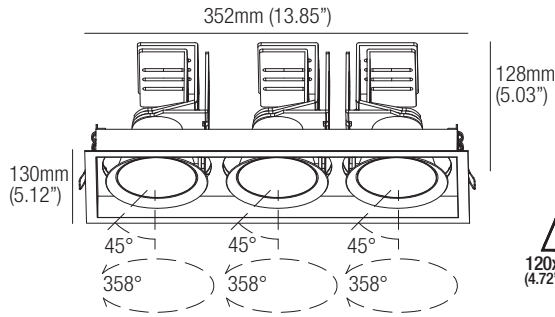

**Photometric diagrams**

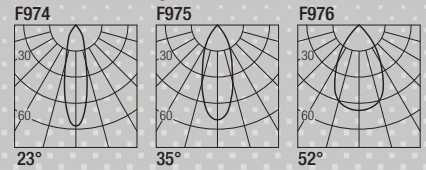

CCT	FLUX <sub>(Lx3)</sub>	CRI
2700K	1700 lm	93
3000K	1830 lm	93
3500K	1890 lm	93
4000K	1950 lm	93

**Code Construction**


Construction du code produit  
Construcción del código de producto

**LLX23 | X | XX | 9 | X |**

<b>LLX23</b>	<b>X</b>	<b>Finishing</b> Finitions Acabados	<b>XX</b>	<b>Color Temp.</b> Température couleur Temperatura de color	<b>9</b>	<b>X</b>	<b>Beam angle</b> Angle de faisceau Ángulo del haz
		<p><b>1</b> White Blanc Blanco</p> <p><b>5</b> Black Noir Negro</p> <p><b>C</b> Custom Personnalisée Personalizado</p>		<p><b>27</b> 2700K</p> <p><b>30</b> 3000K</p> <p><b>35</b> 3500K</p> <p><b>40</b> 4000K</p> <p><b>CU</b> Custom Personnalisée Personalizado</p>			<p><b>S</b> 23°</p> <p><b>M</b> 35°</p> <p><b>W</b> 52°</p>


**Drivers (Remote)**

Alimentateurs  
Alimentadores

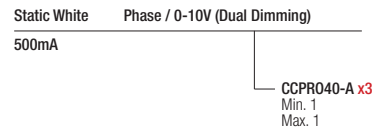

**Series wiring**

Câblage en série  
Cableado en serie




For other driver options - including Lutron, Dali and DMX - please consult factory

**T-Bar Installation**


**MP-X340**

Mounting Plate with 340x120mm Hole

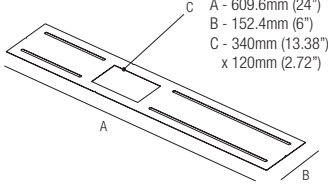

**X04340**


Mounting Plate with 340x120mm Hole

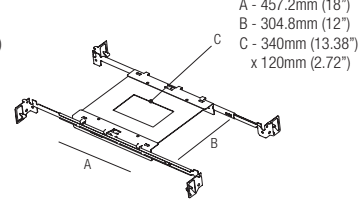

**Optionals - Accessoires - Accesorios**

**3 x DCVI.B.2**

24VDC Constant Voltage to Constant Current Converter 0-10V / Phase / Dim to Warm Compatible, 26W



**IC Housings**

**IC181X04340**

Recessed Box for Insulated Ceiling with 340x120mm Hole

**AT181X04340**

Air Tight Recessed Box for Insulated Ceiling with 340x120mm Hole

