


LOREN 20

design: Lapo Grassellini




Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V, 36V)

Power
Pouissance
Potencia
20W



Photometric diagrams

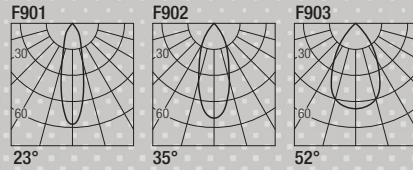

CCT	Flux	CRI
2700K	1659 lm	93
3000K	1752 lm	93
3500K	1873 lm	93
4000K	1925 lm	93

Code Construction

Construction du code produit
Construcción del código de producto

LR2 | X | XX | 9 | X

LR2	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K			S 23°
		5 Black Noir Negro		30 3000K			M 35°
		C Custom Personnalisée Personalizado		35 3500K			W 52°
				40 4000K			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores


Static White Phase / 0-10V (Dual Dimming)

500mA

CCPR040-A
Min. 1
Max. 1

Series wiring


Câblage en série
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

MP-Q090


Mounting Plate with 90mm Hole



T-Bar Installation

Q02090

Mounting Plate with 90mm Hole




IC Housings

IC086Q02090

Recessed Box for Insulated Ceiling with 90mm Hole

AT086Q02090

Air Tight Recessed Box for Insulated Ceiling with 90mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.2

24VDC Constant Voltage to Constant Current Converter 0-10V / Phase / Dim to Warm Compatible, 26W

