



LOREN 40

design: Lapo Grassellini




Supply current
Courant d'alimentation
Corriente de alimentación
1050mA (V, 36V)

Power
Pouissance
Potencia
40W

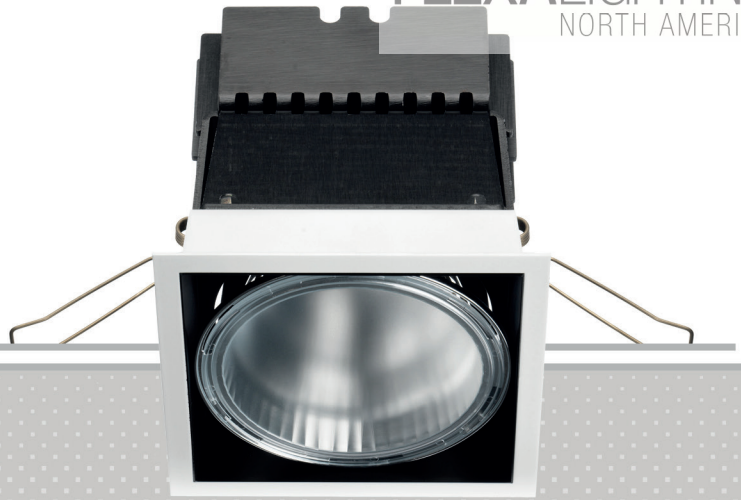

Photometric diagrams

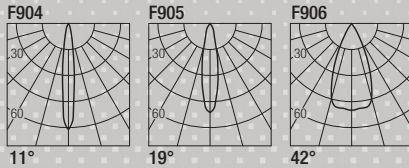

CCT	Flux	CRI
2700K	3400 lm	93
3000K	3660 lm	93
3500K	3780 lm	93
4000K	3900 lm	93

Code Construction

Construction du code produit
Construcción del código de producto

LR4 | X | XX | 9 | X


LR4	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K			S 11°
		5 Black Noir Negro		30 3000K			M 19°
		C Custom Personnalisée Personalizado		35 3500K			W 42°
				40 4000K			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie




For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White Phase / 0-10V (Dual Dimming)

1050mA


CCPR040-A
Min. 1
Max. 1

MP-Q120
Mounting Plate
with 120mm Hole



T-Bar Installation

Q03120
Mounting Plate
with 120mm Hole

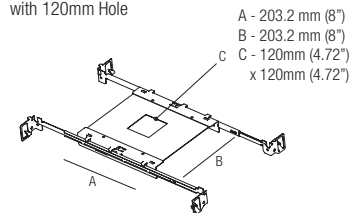

IC Housings

IC127Q03120
Recessed Box for
Insulated Ceiling
with 120mm Hole

AT127Q03120
Air Tight Recessed
Box for Insulated
Ceiling with
120mm Hole

