
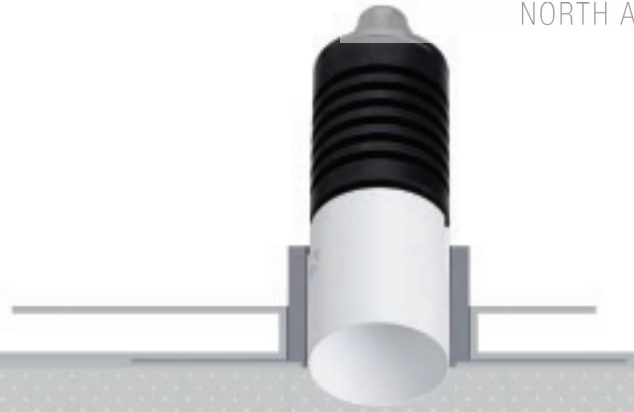


# MAE 2

design: Roberto Mantovani

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**500mA** (V<sub>f</sub> 2.9V)

**Power**  
Puissance  
Potencia  
**1.5W**



## Photometric diagrams



CCT	Flux	CRI
2700K	128 lm	93
3000K	133 lm	93
3500K	143 lm	93
4000K	154 lm	93

## Code Construction

Construction du code produit  
Construcción del código de producto

**ME1 X XX 5**

ME1	X	Finishing	XX	Color Temp.	5	Beam angle
		Finitions Acabados		Température couleur Temperatura de color		Angle de faisceau Angulo del haz
		<b>B</b> White Blanc Blanco		<b>27</b> 2700K		<b>5</b> 5°
		<b>N</b> Black Noir Negro		<b>30</b> 3000K		
		<b>C</b> Custom Personnalisée Personalizado		<b>35</b> 3500K		
				<b>40</b> 4000K		
				<b>CU</b> Custom Personnalisée Personalizado		


## Drivers (Remote)

Alimentateurs  
Alimentadores

Static White	Phase / 0-10V (Dual Dimming)	
500mA	CCPRO10-A Min. 1 Max. 6	CCPRO40-A Min. 1 Max. 18


## Series wiring

Câblage en série  
Cableado en serie




For other driver options -  
including Lutron, Dali and DMX -  
please consult factory

**MP-R050**  
Mounting Plate  
with 40mm Hole



## T-Bar Installation


**R02050**  
Mounting Plate  
with 40mm Hole

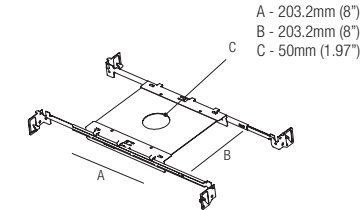

## IC Housings

**IC086R02050**  
Recessed Box for  
Insulated Ceiling with  
50mm Hole


**AT086R02050**  
Air Tight Recessed  
Box for Insulated  
Ceiling with  
50mm Hole



## Accessories - Accessoires - Accesorios

### ZQT00U


**Plasterboard  
recessing frame**  
Boîtier d'encastrement  
pour plaques de plâtre  
Cajetín para placas de yeso



Hole Cut:  
50mm  
(1.97 inches)

### ZQT00U.BMK

**Backmount frame**  
Pierre/bois montage arrière  
Roca/madera montaje trasero



Hole Cut:  
42mm  
(1.65 inches)