


MAUNA 10


design: Rod&Todd

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V, 18V)

Power
Puissance
Potencia
10W



Photometric diagrams

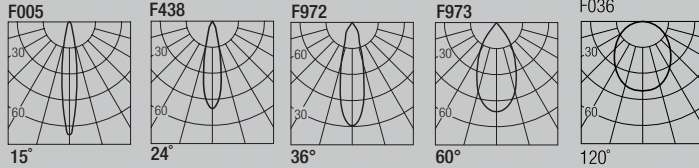

CCT	Flux	CRI	CCT	Flux	CRI
2400K	837 lm	95+	Dim to Warm 1800K-3000K	725 lm	95
2700K	921 lm	98+			
3000K	977 lm	98+			
3500K	1016 lm	98+			
4000K	1055 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

MU1 | X | XX | X |


MU1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	X	Beam angle Angle de faisceau Ángulo del haz
	2	Aluminum Aluminium Aluminio	24	2400K	N	15°
	5	Black Noir Negro	27	2700K	S	24°
	6	Bronze Bronce	30	3000K	M	36°
	C	Custom Personnalisée Personalizado	35	3500K	W	60°
			40	4000K	X	120°
			DW	Dim Warm		
			CU	Custom Personnalisée Personalizado		

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dalí and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)	
500mA	CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3
Dim to Warm	Phase / 0-10V (Dual Dimming)	
400mA	CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 3

L101

Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

XNTX202	XNTX205	XNTX206	Antiglare Snoot
Aluminum Aluminium Aluminio	Black Noir Negro	Bronze Bronce	

XXT01
Tree strap

Optionals - Accessoires - Accesorios

CP0022
Earth spike
Piquet de terre
Pico de la tierra



XP0200	XP0500	XP0600	Base
Aluminum Aluminium Aluminio	Black Noir Negro	Bronze Bronce	
			20mm (0.79") 69mm (2.72")

DCVI.B.1
24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13V

