



MAUNA 6


design: Rod&Todd

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 8.7V)

Power
 Pouissance
 Potencia
4.5W

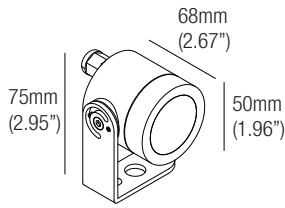

Photometric diagrams

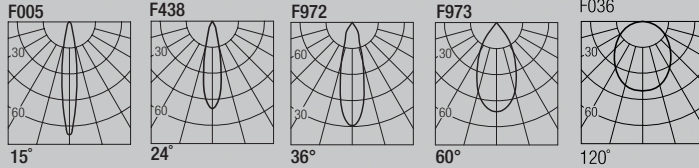

CCT	Flux	CRI
2400K	472 lm	95+
2700K	421 lm	98+
3000K	446 lm	98+
3500K	464 lm	98+
4000K	482 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	416 lm	90

Code Construction

Construction du code produit
 Construcción del código de producto

MU6 | X | XX | X |


MU6	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	X	Beam angle Angle de faisceau Ángulo del haz
		2 Aluminum Aluminium Aluminio		24 2400K		N 15°
		5 Black Noir Negro		27 2700K		S 24°
		6 Bronze Bronce		30 3000K		M 36°
		C Custom Personnalisée Personalizado		35 3500K		W 60°
				40 4000K		X 120°
				DW Dim Warm		
				CU Custom Personnalisée Personalizado		

Drivers (Remote)


Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

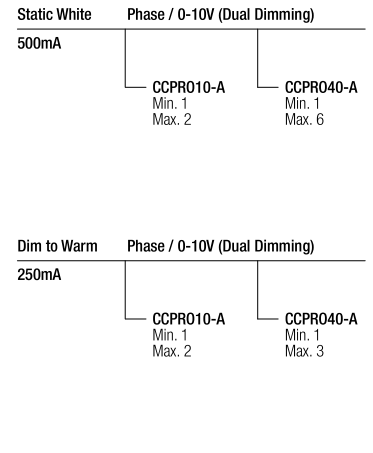

L601

Low luminance louvre
 Filtre basse luminance
 Filtro de baja luminancia



Note: the filter must be ordered together with the lighting fixture
 Note: le filtre doit être commandé en même temps que l'appareil
 Nota: el filtro debe pedirse junto con la luminaria

XNTM02

Aluminum
 Aluminium
 Aluminio

XNTM05

Black
 Noir
 Negro

XNTM06

Bronze
 Bronze

Antiglare Snoot



XXT01


Tree strap



Optionals - Accessoires - Accesorios

CP0022

Earth spike
 Piquet de terre
 Pico de la tierra



XP0200

Aluminum
 Aluminium
 Aluminio

XP0500


Black
 Noir
 Negro

XP0600

Bronze
 Bronze

Base

20mm
 (0.79\"/>



69mm (2.72\"/>

DCVI.B.1

24VDC Constant Voltage to
 Constant Current Converter
 0-10V / Phase / Dim to Warm
 Compatible, 13W

