
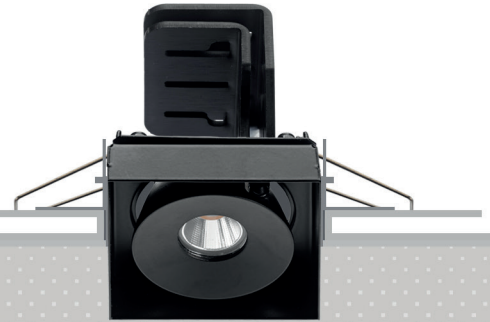


MILO 10


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 18V)

Power
Puissance
Potencia
10W



Photometric diagrams

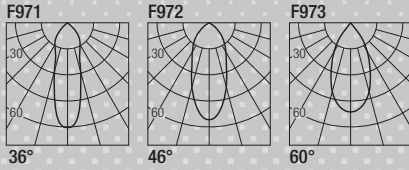

CCT	Flux	CRI
2400K	837 lm	95+
2700K	921 lm	98+
3000K	977 lm	98+
3500K	1016 lm	98+
4000K	1055 lm	98+

CCT	Flux	CRI
Dim to Warm 1800K-3000K	725 lm	95
Tunable White 2700K-5000K	952 lm	95

Code Construction

Construction du code produit
Construcción del código de producto

ML1 | X | XX | 9 | X |


ML1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
	1	White Blanc Blanco	24	2400K		S	36°
	5	Black Noir Negro	27	2700K		M	46°
	C	Custom Personnalisée Personalizado	30	3000K		W	60°
			35	3500K		D	20+55° (Elliptical)
			40	4000K			
			DW	Dim Warm			
			TW	Tunable White			
			CU	Custom Personnalisée Personalizado			

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White 500mA	Phase / 0-10V (Dual Dimming)
	CCPR010-A Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 3
Dim to Warm 400mA	Phase / 0-10V (Dual Dimming)
	CCPR010-A Min. 1 Max. 1
	CCPR040-A Min. 1 Max. 3
Turnable White 500mA	Please consult factory for driver options

L001


Low luminance louvre
Filtre basse luminance
Filtro de baja luminancia




Note: the filter must be ordered together with the lighting fixture
Note: le filtre doit être commandé en même temps que l'appareil
Nota: el filtro debe pedirse junto con la luminaria

T-Bar Installation

MP-Q077
Mounting Plate
with 77mm Hole




Q01077
Mounting Plate
with 77mm Hole

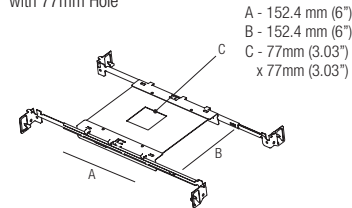

IC Housings

IC064Q01077
Recessed Box for
Insulated Ceiling
with 77mm Hole


AT064Q01077
Air Tight Recessed
Box for Insulated
Ceiling with
77mm Hole



Accessories - Accessoires - Accesorios

MLX11Q


**Plasterboard
recessing frame**
Boîtier d'encastrement
pour plaques de plâtre
Cajetín para placas de yeso



Hole Cut:
77mm
(3.03")

MLX11Q.WF

Backmount frame
Pierre/bois montage arrière
Roca/madera montaje trasero



Hole Cut:
74mm
(2.91")

Optionals - Accessoires - Accesorios

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

