


MILO X120


design: Lapo Grassellini

Supply current
 Courant d'alimentation
 Corriente de alimentación
500mA (V_f 2 x 18V)

Power
 Pouissance
 Potencia
2 x 10W

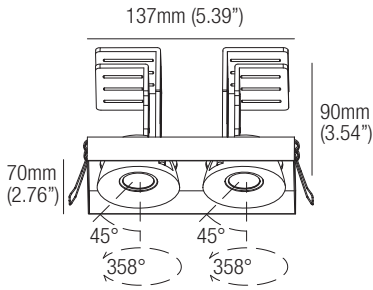

Photometric diagrams

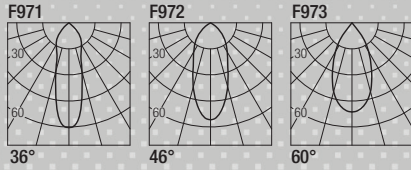

CCT	Flux _(x2)	CRI	CCT	Flux	CRI
2700K	921 lm	98+	Dim to Warm	725 lm	95
3000K	977 lm	98+	1800K-3000K		
3500K	1016 lm	98+			
4000K	1055 lm	98+			

Code Construction

Construction du code produit
 Construcción del código de producto

MLX12 | X | XX | 9 | X |


MLX12	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K			S 36°
		5 Black Noir Negro		30 3000K			M 46°
		C Custom Personnalisée Personalizado		35 3500K			W 60°
				40 4000K			D 20+55° (Elliptical)
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)


Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



For other driver options -
 including Lutron, Dali and DMX -
 please consult factory

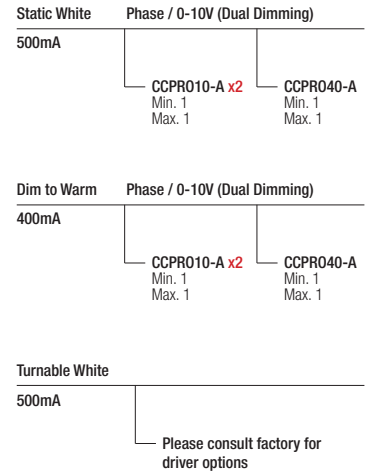

Optionals - Accessoires - Accesorios

IC Housings

IC086X02144
 Recessed Box for
 Insulated Ceiling
 with 144x77mm Hole

AT086X02144
 Air Tight Recessed
 Box for Insulated
 Ceiling with
 144x77mm Hole

