


# MILO X120


design: Lapo Grassellini

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**500mA** (V<sub>f</sub> 2 x 18V)

**Power**  
Pouissance  
Potencia  
**2 x 10W**

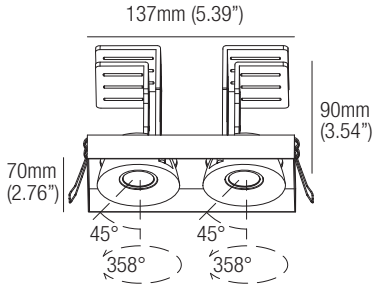

## Photometric diagrams

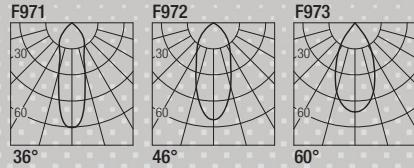

CCT	Flux <sub>(x2)</sub>	CRI	CCT	Flux	CRI
2400K	837 lm	95+	Dim to Warm 1800K-3000K	725 lm	95
2700K	921 lm	98+	Tunable White 2700K-5000K	952 lm	95
3000K	977 lm	98+			
3500K	1016 lm	98+			
4000K	1055 lm	98+			

## Code Construction

Construction du code produit  
Construcción del código de producto

## MLX12 | X | XX | 9 | X |


<b>MLX12</b>	<b>X</b>	<b>Finishing</b> Finitions Acabados	<b>XX</b>	<b>Color Temp.</b> Température couleur Temperatura de color	<b>9</b>	<b>X</b>	<b>Beam angle</b> Angle de faisceau Ángulo del haz
		<p><b>1</b> White Blanc Blanco</p> <p><b>5</b> Black Noir Negro</p> <p><b>C</b> Custom Personnalisée Personalizado</p>		<p><b>24</b> 2400K</p> <p><b>27</b> 2700K</p> <p><b>30</b> 3000K</p> <p><b>35</b> 3500K</p> <p><b>40</b> 4000K</p> <p><b>DW</b> Dim Warm</p> <p><b>TW</b> Tunable White</p> <p><b>CU</b> Custom Personnalisée Personalizado</p>			<p><b>S</b> 36°</p> <p><b>M</b> 46°</p> <p><b>W</b> 60°</p> <p><b>D</b> 20+55° (Elliptical)</p>

## Drivers (Remote)


Alimentateurs  
Alimentadores

## Series wiring

Câblage en série  
Cableado en serie



For other driver options -  
including Lutron, Dali and DMX -  
please consult factory

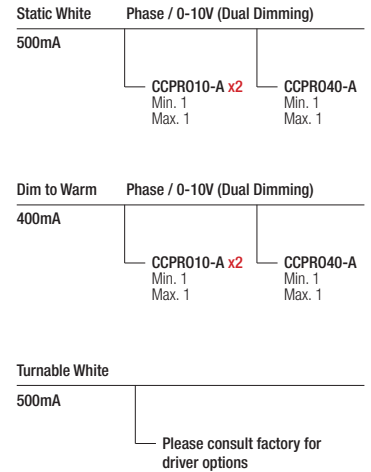

## 2 x L001

### Low luminance louvre


Filtere basse luminance  
Filtro de baja luminancia



**Note:** the filter must be ordered together with the lighting fixture  
**Note:** le filtre doit être commandé en même temps que l'appareil  
**Note:** el filtro debe pedirse junto con la luminaria

## MP-X144


Mounting Plate  
with 144x77mm Hole

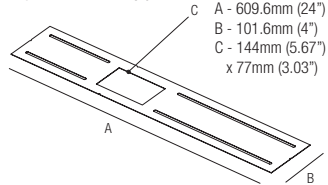

## T-Bar Installation

### XO2144

Mounting Plate  
with 144x77mm Hole

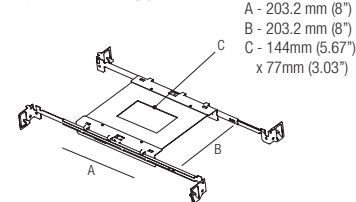


## IC Housings

### IC086X02144

Recessed Box for  
Insulated Ceiling  
with 144x77mm Hole

### AT086X02144

Air Tight Recessed  
Box for Insulated  
Ceiling with  
144x77mm Hole

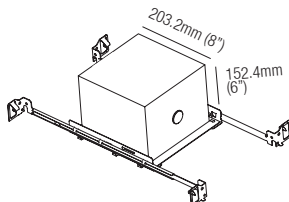


## Accessories - Accessoires - Accesorios

### MLX12Q

#### Plasterboard recessing frame

Boîtier d'encastrement  
pour plaques de plâtre  
Cajetín para placas de yeso




**Hole Cut:**  
77mm x 144mm  
(3.03" x 5.67")

### MLX12Q.WF

#### Backmount frame

Pierre/bois montage arrière  
Roca/madera montaje trasero



**Hole Cut:**  
74mm x 141mm  
(2.91" x 5.55")

## Optionals - Accessoires - Accesorios

### DCVI.B.2

24VDC Constant Voltage to  
Constant Current Converter  
0-10V / Phase / Dim to Warm  
Compatible, 26W

