

# MINE 30

design: Lapo Grassellini

## Supply current


Courant d'alimentation  
Corriente de alimentación

700mA (V<sub>i</sub> 36V)


## Power

Pouissance  
Potencia

30W



## Photometric diagrams

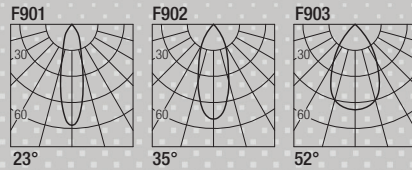

CCT	Flux	CRI
2700K	2380 lm	93
3000K	2560 lm	93
3500K	2645 lm	93
4000K	2730 lm	93

## Code Construction

Construction du code produit  
Construcción del código de producto

MN3 | X | XX | 9 | X |

MN3	X	Finishing Finitions Acabados
	1	White Blanc Blanco
	5	Black Noir Negro
	C	Custom Personnalisée Personalizado

XX	Color Temp. Température couleur Temperatura de color
	27 2700K
	30 3000K
	35 3500K
	40 4000K
	CU Custom Personnalisée Personalizado


9	X	Beam angle Angle de faisceau Ángulo del haz
	S	23°
	M	35°
	W	52°

## Drivers (Remote)

Alimentateurs  
Alimentadores

## Series wiring

Câblage en série  
Cableado en serie




For other driver options -  
including Lutron, Dali and DMX -  
please consult factory

Static White	Phase / 0-10V (Dual Dimming)
700mA	CCPRO40-A Min. 1 Max. 1

## MP-R110


Mounting Plate  
with 110mm Hole



## T-Bar Installation

## R02110

Mounting Plate  
with 110mm Hole

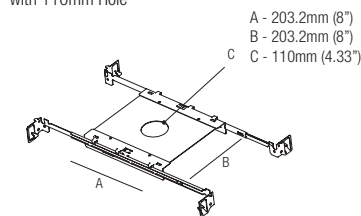

## IC Housings

## IC086R02110

Recessed Box for  
Insulated Ceiling  
with 110mm Hole

## AT086R02110

Air Tight Recessed  
Box for Insulated  
Ceiling with  
110mm Hole

