


MINE 6


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 8.7V)

Power
Pouissance
Potencia
4.5W



Photometric diagrams

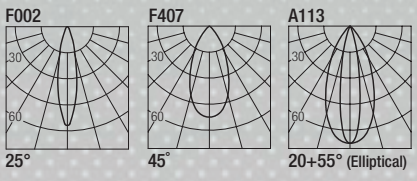

| CCT | Flux | CRI | CCT | Flux | CRI |
|-------|--------|-----|----------------------------|--------|-----|
| 2400K | 472 lm | 95+ | Dim to Warm 1800K-3000K | 416 lm | 90 |
| 2700K | 421 lm | 98+ | | | |
| 3000K | 446 lm | 98+ | | | |
| 3500K | 464 lm | 98+ | | | |
| 4000K | 482 lm | 98+ | | | |

Code Construction

Construction du code produit
Construcción del código de producto

MN6 | X | XX | X | E |


| MN6 | X | Finishing Finitions Acabados | XX | Color Temp. Température couleur Temperatura de color | X | Beam angle Angle de faisceau Ángulo del haz | E |
|------------|----------|---|-----------|---|----------|--|----------|
| | 1 | White Blanc Blanco | 24 | 2400K | S | 25° | |
| | 5 | Black Noir Negro | 27 | 2700K | M | 45° | |
| | C | Custom Personnalisée Personalizado | 30 | 3000K | D | 20+55° (Elliptical) | |
| | | | 35 | 3500K | | | |
| | | | 40 | 4000K | | | |
| | | | DW | Dim Warm | | | |
| | | | CU | Custom Personnalisée Personalizado | | | |

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring


Câblage en série
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory


| Static White | Phase / 0-10V (Dual Dimming) | |
|--------------|-------------------------------|-------------------------------|
| 500mA | CCPRO10-A Min. 1 Max. 2 | CCPRO40-A Min. 1 Max. 6 |
| Dim to Warm | Phase / 0-10V (Dual Dimming) | |
| 250mA | CCPRO10-A Min. 1 Max. 2 | CCPRO40-A Min. 1 Max. 3 |

MP-R051
Mounting Plate
with 51mm Hole



T-Bar Installation


R01051
Mounting Plate
with 51mm Hole

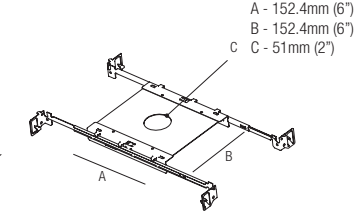

IC Housings

IC064R01051
Recessed Box for
Insulated Ceiling
with 51mm Hole

AT064R01051
Air Tight Recessed
Box for Insulated
Ceiling with
51mm Hole



Optionals - Accessoires - Accesorios

DCVI.B.1
24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

