
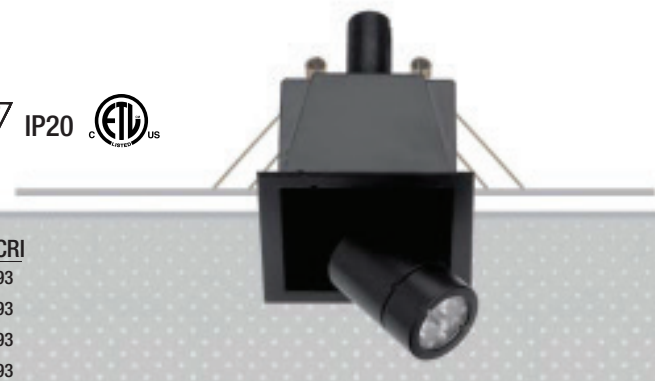


MINILED A Q10


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
350mA (V_f 8.7V)

Power
Pouissance
Potencia
3W



Photometric diagrams



| CCT | Flux | CRI |
|-------|--------|-----|
| 2700K | 267 lm | 93 |
| 3000K | 279 lm | 93 |
| 3500K | 292 lm | 93 |
| 4200K | 309 lm | 93 |

Code Construction

Construction du code produit
Construcción del código de producto

MLDQ₁X₁XX₁X₁

| MLDQ | X | Finishing Finitions Acabados | XX | Color Temp. Température couleur Temperatura de color | X | Beam angle Angle de faisceau Ángulo del haz |
|-------------|----------|---|-----------|---|----------|--|
| | 1 | White Blanc Blanco | 27 | 2700K | 1 | 18° |
| | 5 | Black Noir Negro | 30 | 3000K | 2 | 40° |
| | C | Custom Personnalisée Personalizado | 35 | 3500K | | |
| | | | 42 | 4200K | | |
| | | | CU | Custom Personnalisée Personalizado | | |


Drivers (Remote)

Alimentateurs
Alimentadores

| Static White | Phase / 0-10V (Dual Dimming) | |
|--------------|-------------------------------|-------------------------------|
| 350mA | CCPRO10-A Min. 1 Max. 3 | CCPRO40-A Min. 1 Max. 6 |

Series wiring


Câblage en série
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

MP-Q058


Mounting Plate with 58mm Hole



T-Bar Installation


Q01058

Mounting Plate with 58mm Hole

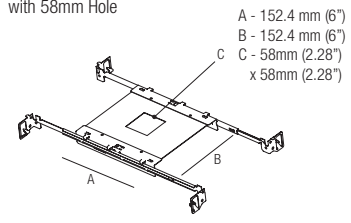

DCVI.B.1

24VDC Constant Voltage to Constant Current Converter
0-10V / Phase / Dim to Warm Compatible, 13W



IC Housings

IC086Q02058

Recessed Box for Insulated Ceiling with 58mm Hole

AT086Q02058

Air Tight Recessed Box for Insulated Ceiling with 58mm Hole

