


MINILED A QX120


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
350mA (V_f 2 x 8.7V)

Power
Pouissance
Potencia
2 x 3W



Photometric diagrams



CCT	Flux _{x2}	CRI
2700K	267 lm	93
3000K	279 lm	93
3500K	292 lm	93
4200K	309 lm	93

Code Construction


Construction du code produit
Construcción del código de producto

MLDQX12 | X | XX | X

MLDQX12	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K	1 18°	
		5 Black Noir Negro		30 3000K	2 40°	
		C Custom Personnalisée Personalizado		35 3500K		
				42 4200K		
				CU Custom Personnalisée Personalizado		


Drivers (Remote)

Alimentateurs
Alimentadores

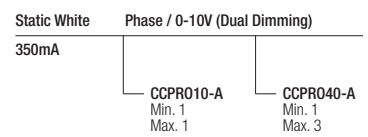

Series wiring


Câblage en série
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

MP-X105


Mounting Plate with 105x58mm Hole



T-Bar Installation


X02105

Mounting Plate with 105x58mm Hole

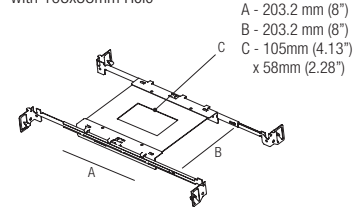

DCVI.B.1

24VDC Constant Voltage to Constant Current Converter
0-10V / Phase / Dim to Warm Compatible, 13W



IC Housings

IC086X02105

Recessed Box for Insulated Ceiling with 105x58mm Hole

AT086X02105

Air Tight Recessed Box for Insulated Ceiling with 105x58mm Hole

