


MINILED A QX130


design: Lapo Grassellini

Supply current
 Courant d'alimentation
 Corriente de alimentación
350mA (V, 3 x 8.7V)

Power
 Pouissance
 Potencia
3 x 3W

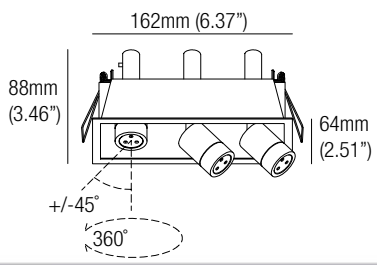

Photometric diagrams



CCT	Flux (lx)	CRI
2700K	128 lm	98+
3000K	133 lm	98+
3500K	142 lm	98+
4000K	154 lm	85
Custom	TBD	

Code Construction

Construction du code produit
 Construcción del código de producto

MLDQX13 | X | XX | X | E


MLDQX13	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	X	Beam angle Angle de faisceau Ángulo del haz	E
		<ul style="list-style-type: none"> 1 White Blanc Blanco 2 Grey Gris 5 Black Noir Negro 		<ul style="list-style-type: none"> 27 2700K 30 3000K 35 3500K 40 4000K CU Custom 		<ul style="list-style-type: none"> S 25° M 60° 	

Drivers

Alimentateurs
 Alimentadores

Series wiring

Câblage en série
 Cableado en serie



0-10V

FLEXA-60-PRO-CC-10V
 Programmable 60W CC 0-10V Dimming
 Dimming Range: 0.01%
Min. 1./Max. 2 Fixtures per Driver

Phase

FLEXA-12-350-CC-ELV
 12W 350mA Constant Current
 Dimming Range: 10%
Min. 1./Max. 1 Fixtures per Driver

FLEXA-16-350-CC-ELV
 16W 350mA Constant Current
 Dimming Range: 10%
Min. 1./Max. 1 Fixtures per Driver

Lutron Forward Phase


LTEA.1
 Hi-Lume Forward Phase
 20W 350mA Constant Current
 Dimming Range: 1%
Min. 1./Max. 2 Fixtures per Driver

LTEA.2
 Hi-Lume Forward Phase
 30W 350mA Constant Current
 Dimming Range: 1%
Min. 2./Max. 3 Fixtures per Driver


Lutron Ecosystem

PEQ.1
 Hi-Lume ECO System
 20W 350mA Constant Current
 Dimming Range: 1%
Min. 1./Max. 2 Fixtures per Driver


PEQ.0
 Hi-Lume ECO System Premier
 20W 350mA Constant Current
 Dimming Range: 0.1%
Min. 1./Max. 2 Fixtures per Driver



X02154-W0A
 Mounting Plate
 with 154x58mm Hole
 A - 203.2mm (8")
 B - 203.2mm (8")
 C - 154mm (6.06")
 x 58mm (2.28")



X02154
 Mounting Plate
 with 154x58mm Hole
 A - 203.2mm (8")
 B - 203.2mm (8")
 C - 154mm (6.06")
 x 58mm (2.28")



IC086X02154
 Recessed Box for Insulated Ceiling
 with 154x58mm Hole
AT086X02154
 Air Tight Recessed Box for Insulated
 Ceiling with 154x58mm Hole