


MINILED A QX130


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
350mA (V_L 3 x 8.7V)

Power
Pouissance
Potencia
3 x 3W

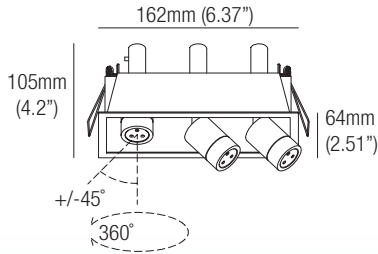

Photometric diagrams



CCT	Flux _{0.5°}	CRI
2700K	267 lm	93
3000K	279 lm	93
3500K	292 lm	93
4200K	309 lm	93

Code Construction

Construction du code produit
Construcción del código de producto

MLDQX13 | X | XX | X | X

MLDQX13	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	X	Beam angle Angle de faisceau Ángulo del haz
		<p>1 White Blanc Blanco</p> <p>5 Black Noir Negro</p> <p>C Custom Personnalisée Personalizado</p>		<p>27 2700K</p> <p>30 3000K</p> <p>35 3500K</p> <p>42 4200K</p> <p>CU Custom Personnalisée Personalizado</p>		<p>1 18°</p> <p>2 40°</p>


Drivers (Remote)

Alimentateurs
Alimentadores

Static White	Phase / 0-10V (Dual Dimming)	
350mA	CCPRO10-A Min. 1 Max. 1	CCPRO40-A Min. 1 Max. 2

Series wiring


Câblage en série
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

MP-X154


Mounting Plate
with 154x58mm Hole



T-Bar Installation


X02154

Mounting Plate
with 154x58mm Hole

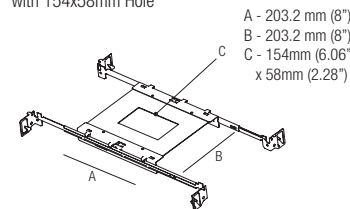

DCVI.B.1

24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W



IC Housings

IC086X02154

Recessed Box for
Insulated Ceiling
with 154x58mm Hole

AT086X02154

Air Tight Recessed
Box for Insulated
Ceiling with
154x58mm Hole

