


MINISASHA 130 U

design: Lapo Grassellini

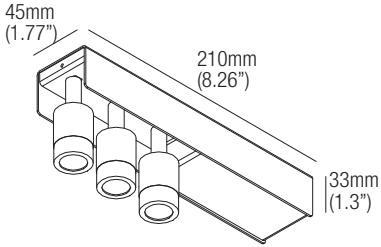


Supply current
Courant d'alimentation
Corriente de alimentación
350mA (V_f 3 x 8.7V)

Power
Pouissance
Potencia
3 x 3W



Photometric diagrams



CCT	Flux _(x3)	CRI
2700K	267 lm	93
3000K	279 lm	93
3500K	292 lm	93
4200K	309 lm	93



Code Construction

Construction du code produit
Construcción del código de producto


MSU13 | X | X | XX |

MSU13	X	Finishing Finitions Acabados	X	Beam angle Angle de faisceau Ángulo del haz	XX	Color Temp. Température couleur Temperatura de color
		1 White Blanc Blanco		1 18°		27 2700K
		5 Black Noir Negro		2 40°		30 3000K
		C Custom Personnalisée Personalizado				35 3500K
						42 4200K
						CU Custom Personnalisée Personalizado

Drivers (Remote)

Alimentateurs
Alimentadores

Series wiring
Câblage en série
Cableado en serie



For other driver options -
including Lutron, Dali and DMX -
please consult factory

Static White	Phase / 0-10V (Dual Dimming)	
350mA	CCPR010-A Min. 1 Max. 1	CCPR040-A Min. 1 Max. 2

DCVI.B.1
24VDC Constant Voltage to
Constant Current Converter
0-10V / Phase / Dim to Warm
Compatible, 13W

