
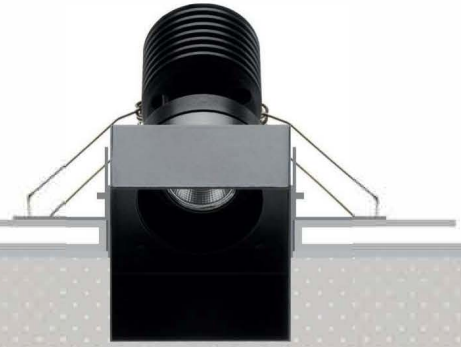



MOON Q10


design: Lapo Grassellini

Supply current
Courant d'alimentation
Corriente de alimentación
500mA (V_f 18V)

Power
Pouissance
Potencia
10W



Photometric diagrams

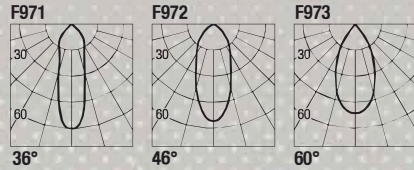

CCT	Flux	CRI	CCT	Flux	CRI
2700K	921 lm	98+	Dim to Warm 1800K-3000K	725 lm	95
3000K	977 lm	98+			
3500K	1016 lm	98+			
4000K	1055 lm	98+			

Code Construction

Construction du code produit
Construcción del código de producto

MQ1 X XX 9 X


MQ1	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		1 White Blanc Blanco		27 2700K			S 36°
		5 Black Noir Negro		30 3000K			M 46°
		C Custom Personnalisée Personalizado		35 3500K			W 60°
				40 4000K			
				DW Dim Warm			
				CU Custom Personnalisée Personalizado			

Drivers (Remote)


Alimentateurs
Alimentadores

Series wiring

Câblage en série
Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

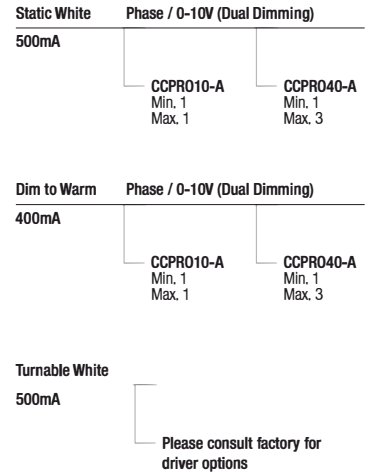

Options - Accessoires - Accesorios

IC Housings

IC064Q01058

Recessed Box for Insulated Ceiling with 58mm Hole

AT064Q01058

Air Tight Recessed Box for Insulated Ceiling with 58mm Hole

