
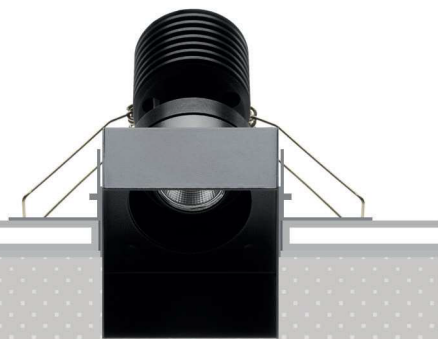


# MOON Q10


design: Lapo Grassellini

**Supply current**  
Courant d'alimentation  
Corriente de alimentación  
**500mA (V<sub>f</sub> 18V)**

**Power**  
Puissance  
Potencia  
**10W**



## Photometric diagrams

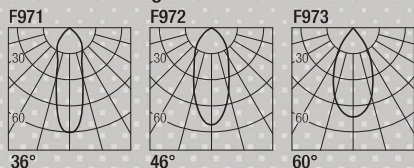

CCT	Flux	CRI	CCT	Flux	CRI
2400K	837 lm		Dim to Warm 1800K-3000K	725 lm	95
2700K	921 lm	98+	Tunable White 2700K-5000K	952 lm	95
3000K	977 lm	98+			
3500K	1016 lm	98+			
4000K	1055 lm	98+			

## Code Construction

Construction du code produit  
Construcción del código de producto

**MQ1 | X | XX | 9 | X**


<b>MQ1</b>	<b>X</b>	<b>Finishing</b> Finitions Acabados	<b>XX</b>	<b>Color Temp.</b> Température couleur Temperatura de color	<b>9</b>	<b>X</b>	<b>Beam angle</b> Angle de faisceau Ángulo del haz
		<b>1</b> White Blanc Blanco		<b>24</b> 2400K			<b>S</b> 36°
		<b>5</b> Black Noir Negro		<b>27</b> 2700K			<b>M</b> 46°
		<b>C</b> Custom Personnalisée Personalizado		<b>30</b> 3000K			<b>W</b> 60°
				<b>35</b> 3500K			
				<b>40</b> 4000K			
				<b>DW</b> Dim Warm			
				<b>TW</b> Tunable White			
				<b>CU</b> Custom Personnalisée Personalizado			

## Drivers (Remote)


Alimentateurs  
Alimentadores

## Series wiring

Câblage en série  
Cableado en serie



For other driver options -  
including Lutron, Dali and DMX -  
please consult factory

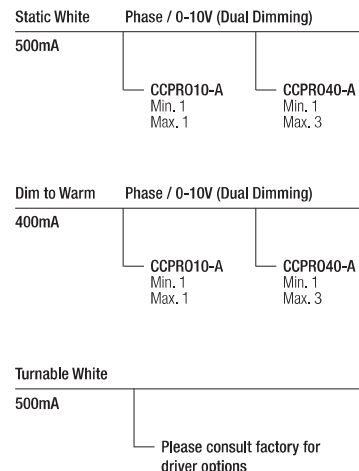

## Low luminance louvre

Filtre basse luminance  
Filtro de baja luminancia


<b>LOH1</b>	<b>LOH1B</b>	<b>LOH1C</b>
White Blanc Blanco	Black Noir Negro	Custom Personnalisée Personalizado



## MQC002

### Plasterboard recessing frame


Boîtier d'encastrement  
pour plaques de plâtre  
Cajetín para placas de yeso



**Hole Cut:**  
58mm  
(2.28")


## MP-Q058

Mounting Plate  
with 58mm Hole

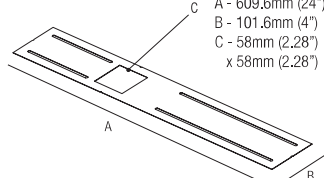

## Q01058


Mounting Plate  
with 58mm Hole

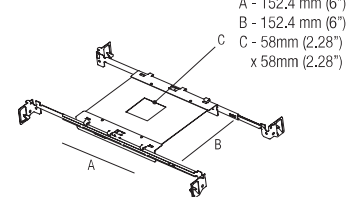

## MQC002.BMK

### Backmount frame


Pierre/bois montage arrière  
Roca/madera montaje trasero



**Hole Cut:**  
58mm  
(2.28")

## DCVI.B.1

24VDC Constant Voltage to  
Constant Current Converter  
0-10V / Phase / Dim to Warm  
Compatible, 13W



## IC Housings

**IC064Q01058**  
Recessed Box for  
Insulated Ceiling  
with 58mm Hole

**AT064Q01058**  
Air Tight Recessed  
Box for Insulated  
Ceiling with  
58mm Hole

