
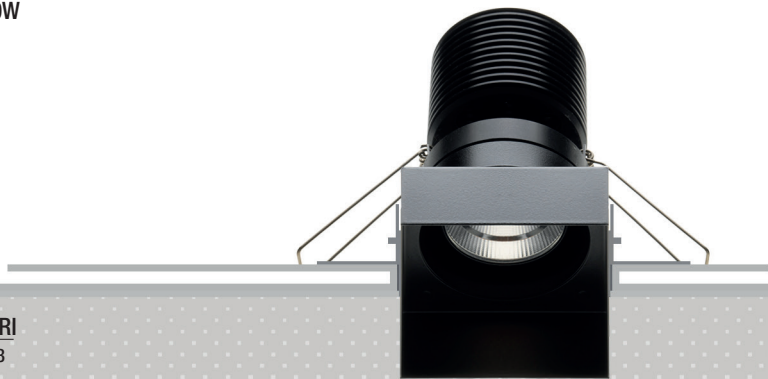


# MOON Q20


design: Lapo Grassellini

**Supply current**  
 Courant d'alimentation  
 Corriente de alimentación  
**500mA (V, 36V)**

**Power**  
 Pouissance  
 Potencia  
**20W**



### Photometric diagrams

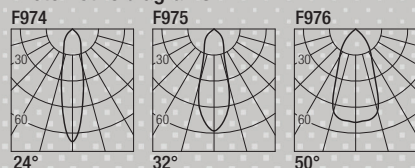

CCT	Flux	CRI
2700K	1659 lm	93
3000K	1752 lm	93
3500K	1873 lm	93
4000K	1925 lm	93

### Code Construction

Construction du code produit  
 Construcción del código de producto

**MQ2 | X | XX | 9 | X |**


MQ2	X	Finishing Finitions Acabados	XX	Color Temp. Température couleur Temperatura de color	9	X	Beam angle Angle de faisceau Ángulo del haz
		<b>1</b> White Blanc Blanco		<b>27</b> 2700K			<b>S</b> 24°
		<b>5</b> Black Noir Negro		<b>30</b> 3000K			<b>M</b> 32°
		<b>C</b> Custom Personnalisée Personalizado		<b>35</b> 3500K			<b>W</b> 50°
				<b>40</b> 4000K			
				<b>CU</b> Custom Personnalisée Personalizado			

### Drivers (Remote)

Alimentateurs  
 Alimentadores

### Series wiring

Câblage en série  
 Cableado en serie



For other driver options - including Lutron, Dali and DMX - please consult factory

Static White Phase / 0-10V (Dual Dimming)



**Low luminance louvre**  
 Filtre basse luminace  
 Filtro de baja luminancia


LOH2	LOH2B	LOH2C
White Blanc Blanco	Black Noir Negro	Custom Personnalisée Personalizado



### Accessories - Accessoires - Accesorios


#### MQC004

**Plasterboard recessing frame**  
 Boîtier d'encastrement pour plaques de plâtre  
 Cajetín para placas de yeso




Hole Cut:  
**80mm (3.15")**

**MP-Q080**  
 Mounting Plate with 80mm Hole



### T-Bar Installation


**Q02080**  
 Mounting Plate with 80mm Hole

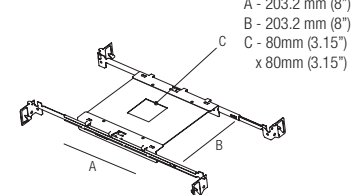

### IC Housings

**IC086Q02080**  
 Recessed Box for Insulated Ceiling with 80mm Hole

**AT086Q02080**  
 Air Tight Recessed Box for Insulated Ceiling with 80mm Hole



### Optionals - Accessoires - Accesorios

#### DCVI.B.2

24VDC Constant Voltage to Constant Current Converter  
 0-10V / Phase / Dim to Warm Compatible, 26W

